


“Stay Connected” with



HEYware Products

a PennEngineering® Company

## Heyco® Nylon PCB Supports - Imperial Spacing

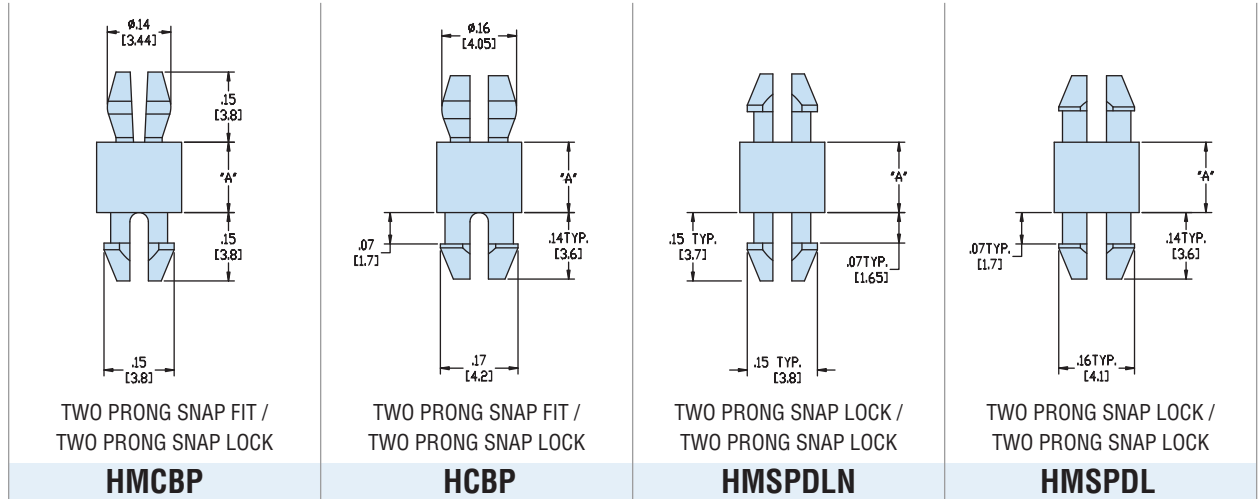

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.125	3,2	.062	1,6	.153	3,9	.062	1,6	.125	3,2	.062	1,6	.153	3,9
<b>Chassis</b>	.062	1,6	.125	3,2	.062	1,6	.153	3,9	.062	1,6	.125	3,2	.062	1,6	.153	3,9

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.								
.063	1,6	<b>10243</b>	HMCBP-01						
.125	3,2	<b>10244</b>	HMCBP-02	<b>10263</b>	HCBP-02	<b>10282</b>	HMSPDLN-02	<b>10301</b>	HMSPDL-02
.187	4,8	<b>10245</b>	HMCBP-03	<b>10264</b>	HCBP-03	<b>10283</b>	HMSPDLN-03	<b>10302</b>	HMSPDL-03
.250	6,4	<b>10246</b>	HMCBP-04	<b>10265</b>	HCBP-04	<b>10284</b>	HMSPDLN-04	<b>10303</b>	HMSPDL-04
.312	7,9	<b>10247</b>	HMCBP-05	<b>10266</b>	HCBP-05	<b>10285</b>	HMSPDLN-05	<b>10304</b>	HMSPDL-05
.375	9,5	<b>10248</b>	HMCBP-06	<b>10267</b>	HCBP-06	<b>10286</b>	HMSPDLN-06	<b>10305</b>	HMSPDL-06
.437	11,1	<b>10249</b>	HMCBP-07	<b>10268</b>	HCBP-07	<b>10287</b>	HMSPDLN-07	<b>10306</b>	HMSPDL-07
.500	12,7	<b>10250</b>	HMCBP-08	<b>10269</b>	HCBP-08	<b>10288</b>	HMSPDLN-08	<b>10307</b>	HMSPDL-08
.562	14,3	<b>10251</b>	HMCBP-09	<b>10270</b>	HCBP-09	<b>10289</b>	HMSPDLN-09	<b>10308</b>	HMSPDL-09
.625	15,9	<b>10252</b>	HMCBP-10	<b>10271</b>	HCBP-10	<b>10290</b>	HMSPDLN-10	<b>10309</b>	HMSPDL-10
.689	17,5	<b>10253</b>	HMCBP-11	<b>10272</b>	HCBP-11	<b>10291</b>	HMSPDLN-11	<b>10310</b>	HMSPDL-11
.750	19,1	<b>10254</b>	HMCBP-12	<b>10273</b>	HCBP-12	<b>10292</b>	HMSPDLN-12	<b>10311</b>	HMSPDL-12
.811	20,6	<b>10255</b>	HMCBP-13	<b>10274</b>	HCBP-13	<b>10293</b>	HMSPDLN-13	<b>10312</b>	HMSPDL-13
.875	22,2	<b>10256</b>	HMCBP-14	<b>10275</b>	HCBP-14	<b>10294</b>	HMSPDLN-14	<b>10313</b>	HMSPDL-14
1.000	25,4	<b>10257</b>	HMCBP-16	<b>10276</b>	HCBP-16	<b>10295</b>	HMSPDLN-16	<b>10314</b>	HMSPDL-16
1.125	28,6	<b>10258</b>	HMCBP-18	<b>10277</b>	HCBP-18	<b>10296</b>	HMSPDLN-18	<b>10315</b>	HMSPDL-18
1.250	31,8	<b>10259</b>	HMCBP-20	<b>10278</b>	HCBP-20	<b>10297</b>	HMSPDLN-20	<b>10316</b>	HMSPDL-20
1.375	34,9	<b>10260</b>	HMCBP-22	<b>10279</b>	HCBP-22	<b>10298</b>	HMSPDLN-22	<b>10317</b>	HMSPDL-22
1.500	38,1	<b>10261</b>	HMCBP-24	<b>10280</b>	HCBP-24	<b>10299</b>	HMSPDLN-24	<b>10318</b>	HMSPDL-24

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

*Quick Specs*

Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)