


Heyco® Wire Protector Terminal Blocks

Screw to Screw—With Wire Protector Flap

- **Wire protector flap** allows the use of STRANDED or SOLID wire with no crimp terminals and no soldering required.
- Allows standardization of the SOLID WIRE Cordset. Input and output wires are always secured with a screw.
- Modern low profile design occupies less real estate.
- No exposed metal parts. “Dead front” designed safety.
- Pressure clamp connectors are supplied in the open position, ready to accept single or multiple solid conductors.
- All sizes are rated at 300 volts (450 volts in Europe).
- Metal parts feature galvanized steel screws and Ni or tin plated brass inserts.
- Available in 94V-0 flame retardant (FR), 6/6 Nylon material.
- **Part No. 9299** fixing pin (below) can be used to mount all terminal blocks, with panel thickness limitations—consult Heyco.
- DFARS Compliant



WIRE SIZE AWG	mm ²	AMPS North America	POLES	PART NO.		DESCRIPTION	Screws (Metric)	PART DIMENSIONS											
				Natural	FR White			A		B		C		D		E		F	
								in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
300 Volts Rated (450 Volts in Europe)																			
12-22	2,5	20	2	9389	9419	TB 0B-WP-2P	M 2,5	0.55	14,1	.70	17,8	.61	15,5	.12	3,0	-	-	.12	3,0
			12	9393	N/A	TB 0B-WP-12P		3.78	96,0							.32	8,2		
10-20	4	30	2	9394	N/A	TB 1B-WP-2P	M 2,6	0.66	16,7	.79	20,0	.66	16,8	.14	3,5	-	-	.14	3,5
			3	9395	N/A	TB 1B-WP-3P		1.05	26,7										
			4	N/A	9426	TB 1B-WP-4P		1.44	36,6							.39	10,0		
			12	9398	9428	TB 1B-WP-12P		4.59	116,7										
8-14	6	50	3	9400	N/A	TB 2B-WP-3P	M 3,5	1.21	30,8	.92	23,4	.75	19,0	.17	4,3	.45	11,5	.15	3,7
			4	9406	N/A	TB 2B-WP-4P		1.67	42,3										
			12	9403	9433	TB 2B-WP-12P		5.29	134,3										

Standard color natural. Flame retardant white available at extra charge.



WIRE PROTECTOR FLAP

LOW PROFILE
STYLE

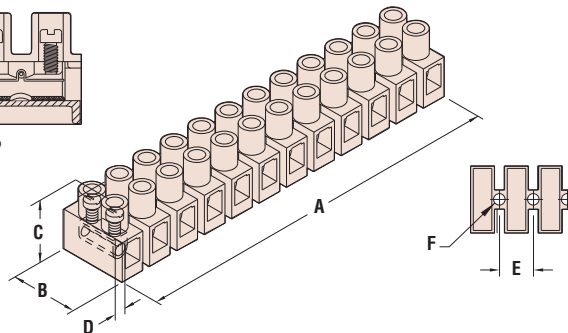

Quick
Specs

Materials
Certifications

6/6 Nylon and brass



Recognized under Component Program of Underwriters' Laboratories to both Canadian and US requirements File E197025



Approved

Flammability Rating
Temperature Range

94V-2

-40°F (-40°C) to 284°F (140°C)