

“Stay Connected” with



Solar Power Components

a PennEngineering® Company

## Heyco® Nytye® Heavy Duty Nylon Cable Ties

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Bundle Diameter		Natural	UV Black		A Length		B Width	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.	
<b>120 Pound</b>										
120	534	1.30	33.0	<b>13172</b>	<b>13172B</b>	NT-120-059	5.91	150	.30	7.6
		1.97	50.0	<b>13175</b>	<b>13175B</b>	NT-120-078	7.87	200		
		2.48	63.0	<b>13178</b>	<b>13178B</b>	NT-120-098	9.84	250		
		3.23	82.0	<b>13181</b>	<b>13181B</b>	NT-120-118	11.81	300		
		3.54	90.0	<b>13183</b>	<b>13183B</b>	NT-120-137	13.78	350		
		3.98	101.0	<b>13185</b>	<b>13185B</b>	NT-120-149	14.96	380		
		4.13	105.0	<b>13186</b>	<b>13186B</b>	NT-120-157	15.75	400		
		6.10	155.0	<b>13190</b>	<b>13190B</b>	NT-120-216	21.65	550		
<b>175 Pound</b>										
175	778	4.13	105.0	<b>13200</b>	<b>13200B</b>	NT-175-157	15.75	400	.35	9.0
		4.92	125.0	<b>13201</b>	<b>13201B</b>	NT-175-177	17.72	450		
		5.91	150.0	<b>13203</b>	<b>13203B</b>	NT-175-195	19.49	495		
		6.30	160.0	<b>13205</b>	<b>13205B</b>	NT-175-217	21.65	550		
		6.89	175.0	<b>13207</b>	<b>13207B</b>	NT-175-236	23.62	600		
		7.48	190.0	<b>13208</b>	<b>13208B</b>	NT-175-256	25.59	650		
		8.07	205.0	<b>13211</b>	<b>13211B</b>	NT-175-276	27.55	700		
		8.86	225.0	<b>13213</b>	<b>13213B</b>	NT-175-299	29.92	760		
		9.65	245.0	<b>13215</b>	<b>13215B</b>	NT-175-315	31.50	800		
		10.67	271.0	<b>13217</b>	<b>13217B</b>	NT-175-362	36.22	920		
		11.42	290.0	<b>13218</b>	<b>13218B</b>	NT-175-394	39.37	1000		
		14.49	368.0	<b>13220</b>	<b>13220B</b>	NT-175-482	48.23	1225		
		18.07	459.0	<b>13223</b>	<b>13223B</b>	NT-175-606	60.63	1540		
		<b>250 Pound</b>								
250	1112	5.47	140.0	<b>13225*</b>	<b>13225B*</b>	NT-250-196	19.68	500	.49	12.5
		6.50	168.0	<b>13226*</b>	<b>13226B*</b>	NT-250-228	22.83	580		
		10.00	190.0	<b>13227*</b>	<b>13227B*</b>	NT-250-256	25.59	650		
		10.71	272.0	<b>13228*</b>	<b>13228B*</b>	NT-250-350	35.04	890		
		10.55	268.0	<b>13229</b>	<b>13229B</b>	NT-250-354	35.43	900		
		11.77	299.0	<b>13230</b>	<b>13230B</b>	NT-250-394	39.37	1000		
		12.72	323.0	<b>13231</b>	<b>13231B</b>	NT-250-433	43.31	1100		
		14.33	364.0	<b>13232</b>	<b>13232B</b>	NT-250-472	47.24	1200		

Standard colors natural and UV Black. Consult Heyco for heat-stabilized material and colors.



\*UL Recognized.

## Heyco® Nytye® Double Loop Cable Ties

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Combined Bundle Diameter F		Natural	<b>NEW</b> UV Black		A Length		B Width	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.	
50	222	1.77	45.0	<b>13320</b>	<b>13320B</b>	NTDL-050-076	7.68	195	.19	4.8
		2.05	52.0	<b>13321</b>	<b>13321B</b>	NTDL-050-088	8.86	225		
		2.99	76.0	<b>13323</b>	<b>13323B</b>	NTDL-050-118	11.81	300		
		3.86	98.0	<b>13324</b>	<b>13324B</b>	NTDL-050-145	14.56	370		

Standard color natural.

$$\varnothing D + \varnothing E = \varnothing F \text{ (MAXIMUM COMBINED BUNDLE } \varnothing \text{)}$$

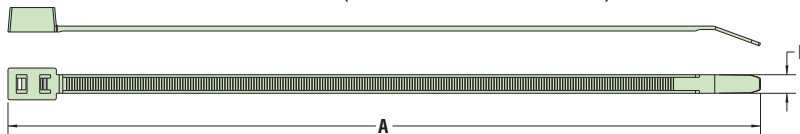

Material

Nylon 6/6

Certifications



Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523 (NT parts only, except those noted otherwise)



Recognized under the Component Program of Underwriters' Laboratories File E54523

Flammability Rating


94V-2

Temperature Range

-40°F (-40°C) to 185°F (85°C)

Quick Specs

- Smooth, radiused edges ensure that Nytyes won't cut into the cable's insulation—or the installer's hand.
- One-piece design reduces cost and installation time.
- Nytyes feature a bent tip for ease of pickup and insertion around small bundles. V-shaped raised ridges on the tip provide a sure grip.
- Close, evenly spaced teeth permit fine adjustment—from .025" (0.6 mm) on the smallest Nytyes to .063" (1.6 mm) on the largest.
- Compliant with MS3367 and MIL-S-23190E

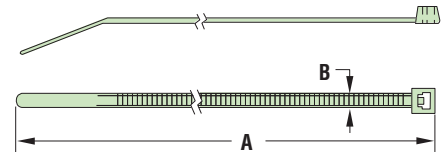

- Cost-effective way to secure and separate two bundles with one cable tie
- Quickly and easily pulls through increasing productivity
- Single part covers multiple bundle sizes resulting in reduced part number inventory