

“Stay Connected” with



Solar Power Components

a PennEngineering® Company

“Coined” edges prevent cable damage






## HEYClip™ SunRunner® Cable Clips for 1-2 Cables

Double-Compression, Straight-thru Design

- Heyco’s SunRunner and SunRunner EZ’s robust “double-compression” design securely holds up to two (2) cables from .20” (5,1 mm) to .30” (7,6 mm) in diameter.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead-in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel, not for use in a marine salt water environment.
- 316 stainless steel now available for marine and other harsh environments.
- **SunRunner Vidrio™ is designed to mount directly onto the glass panel with compression force only.** Will not harm the glass surface, and the black color meets many HOA requirements!
- The TPE coating on the SunRunner Vidrio™ provides an electrically insulated surface.
- **SunRunner EZ’s are designed for thicker module frames** as well as racking – accommodates profiles up to .250” (6,4 mm) thick!

| PANEL THICKNESS CLAMPING RANGE   |         | MINIMUM PANEL FLANGE DEPTH |         | WIRE DIA. RANGE |         | PART NO.                                 |              | DESCRIPTION  | FOOTPRINT                        |            | OVERALL HEIGHT |     |      |
|--|---------|----------------------------|---------|-----------------|---------|--|--------------|--------------|----------------------------------|------------|----------------|-----|------|
| Minimum  | Maximum | Minimum                    | Maximum | Minimum         | Maximum | 304                                      | 316          |              | A x B                            | C          | in.            | mm. |      |
| in.  | mm.     | in.                        | mm.     | in.             | mm.     | Stainless                                | Stainless    |              | in.                              | mm.        | in.            | mm. |      |
| 1-2 Wires - SunRunner Clip for panels up to .125” (3,2 mm) thick               |         |                            |         |                 |         |  |              |              |                                  |            |                |     |      |
| .055   | 1,4     | .125                       | 3,2     | 0.56            | 14,2    | .20” (5,1 mm) - .30” (7,6 mm) each cable | <b>S6405</b> | <b>S6490</b> | SunRunner® Clip 100 Pack         | 1.00 x .50 | 25,4 x 12,7    | .39 | 9,9  |
|  |         |                            |         |                 |         |  | <b>S6445</b> | <b>S6495</b> | SunRunner® Clip Bulk             |            |                |     |      |
| 1-2 Wires - SunRunner Vidrio™ Clip for GLASS panels up to .250” (6,4 mm) thick |         |                            |         |                 |         |  |              |              |                                  |            |                |     |      |
| .13  | 3,2     | .25                        | 6,4     | -               | -       | .20” (5,1 mm) - .30” (7,6 mm) each cable | <b>S6460</b> | -            | SunRunner® Vidrio™ Clip 100 Pack | .99 x .52  | 25,1 x 13,2    | .45 | 11,4 |
|  |         |                            |         |                 |         |  | <b>S6500</b> | -            | SunRunner® Vidrio™ Clip Bulk     |            |                |     |      |
| 1-2 Wires - SunRunner EZ Clip for panels up to .250” (6,4 mm) thick            |         |                            |         |                 |         |  |              |              |                                  |            |                |     |      |
| .09  | 2,3     | .25                        | 6,4     | -               | -       | .20” (5,1 mm) - .30” (7,6 mm) each cable | <b>S6407</b> | -            | SunRunner® EZ Clip 100 Pack      | 1.00 x .50 | 25,4 x 12,7    | .41 | 10,4 |
|  |         |                            |         |                 |         |  | <b>S6447</b> | -            | SunRunner® EZ Clip Bulk          |            |                |     |      |

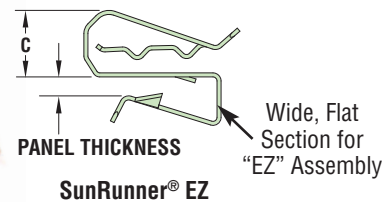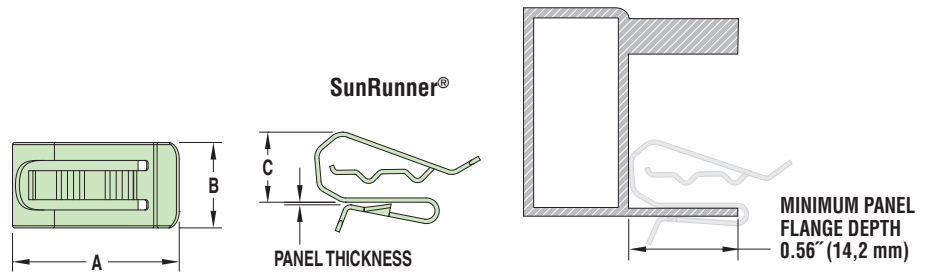

SunRunner® EZ with (optional) UL Approved SunBundler (page 1-11) looped through slot

Quick Specs

|                   |   |
|-------------------|---|
| Material          | .025” thick 304 or 316 stainless steel (SunRunner and SunRunner EZ)                     |
| Certifications    | Certified by UL for Compliance with both Canadian and US Requirements under File E54523 |
| Temperature Range | -40°F (-40°C) to 572°F (300°C)  |