





Heyco-Flex™ Mounting Brackets

- For mounting Heyco-Flex™ Conduit or Tubing securely into place, vertically or horizontally. See pages 1-1 and 1-2.
- Only fingertip pressure is required to snap conduit or tubing into bracket.
- Low profile design for space savings and pleasing appearance.
- Recommended distance between brackets at intervals not greater than 3 feet (1m) as required by Article 351-27 of 1996 NEC.
- Use one standard #10 (4-5M) screw for attaching bracket to panel (screw not included).
- Resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.

FITS CONDUIT/ TUBING SIZE	PART NO.		DESCRIPTION	PART DIMENSIONS									
	Black	Gray		A		B		C		D		E	
				Inside Diam.	Length	Height	Outside Diam.	Width	in.	mm.	in.	mm.	in.
3/8	1025	1026	HFB 3/8	.664	16,9	.912	23,2	.715	18,2	.903	22,9	.750	19,1
1/2	1027	1028	HFB 1/2	.788	20,0	1.074	27,3	.710	18,0	1.056	26,8	.750	19,1
3/4	1029	1030	HFB 3/4	1.050	26,7	1.269	32,2	.670	17,0	1.306	33,2	.750	19,1
1	1031	1032	HFB 1	1.240	31,5	1.520	38,6	.840	21,3	1.530	38,9	.750	19,1

Standard color black or gray.



Dimensions excluding draft




- For use with Heyco-Flex™ fittings.
- Liquid tight, dust tight, and oil tight at enclosure.
- Suitable for wet locations requiring a separate gasket between the box and fitting.
- Also suitable for other panel sealing applications.
- Easy to install since washers seal off on the perimeter, not on the connector threads.
- Special double sealing ridges compensate for minor unevenness at enclosure.

Heyco® Sealing Washers

Will Fit These Electrical Fitting Trade Sizes-NPT	PART NO. Black	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Outside Diameter		C Thickness	
			in.	mm.	in.	mm.	in.	mm.
1/4	3258	SW 1/4	.540	13,7	.796	20,2	.125	3,2
3/8	3259	SW 3/8	.670	17,0	1.010	25,5	.125	3,2
1/2	3260	SW 1/2	.820	20,8	1.240	31,5	.125	3,2
3/4	3261	SW 3/4	1.030	26,2	1.500	38,1	.135	3,4
1	3262	SW 1	1.281	32,5	1.770	45,0	.175	4,4
1-1/4	3264	SW 1-1/4	1.662	42,2	2.160	54,8	.160	4,1

Standard color black.

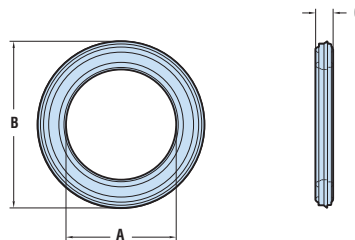

Quick Specs

Mounting Brackets		Sealing Washers	
Material	6/6 nylon	Material	Thermoplastic Elastomer
Flammability Rating	94V-2	Flammability Rating	94V-0
Material Temperature Index	257°F (125°C) Max Temp on the part shall not exceed 221°F (105°C)	Material Temperature Index	257°F (125°C) Max Temp on the part shall not exceed 221°F (105°C)