




# Heyco-Flex™ V Nylon Slit Tubing



NOMINAL DIAMETER	PART NO.	DESCRIPTION	PART DIMENSIONS						ROLL LENGTH
			A Outside Diameter		B Inside Diameter		C Wall Thickness Range		
in.	Black		in.	mm.	in.	mm.	in.	mm.	ft.
1/8	1634A	HF5 1/8	.260	6,6	.168	4,3	.007-.019	0,18-0,48	100
1/4	1635A	HF5 1/4	.390	9,9	.288	7,3	.007-.019	0,18-0,48	100
11/32	1636A	HF5 11/32	.500	12,7	.342	8,7	.007-.019	0,18-0,48	100
3/8	1637A	HF5 3/8	.532	13,5	.415	10,5	.007-.019	0,18-0,48	100
7/16	1638A	HF5 7/16	.613	15,6	.440	11,2	.007-.019	0,18-0,48	100
1/2	1639A	HF5 1/2	.660	16,8	.511	13,0	.007-.019	0,18-0,48	100
5/8	1641A	HF5 5/8	.806	20,5	.663	16,8	.007-.019	0,18-0,48	100
3/4	1642A	HF5 3/4	.928	23,6	.790	20,1	.007-.019	0,18-0,48	100
1	1643A	HF5 1	1.073	27,3	.917	23,3	.007-.019	0,18-0,48	100
1-1/16	1644A	HF5 1-1/16	1.215	30,9	1.010	25,6	.007-.019	0,18-0,48	100
1-1/4	1646A	HF5 1-1/4	1.500	38,1	1.295	32,9	.007-.019	0,18-0,48	100
1-1/2	1649A	HF5 1-1/2	1.734	43,9	1.465	37,2	.007-.019	0,18-0,48	100

Standard color black.

- Multiple sizes 1/8" to 1-1/2".
- Slit design allows side entry and encirclement of pre-assembled harnesses and capillary tubes.
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- Heyco-Flex V is lightweight and flexible, yet durable enough to meet your wire management requirements.
- Unique slit design allows for wire breakouts.
- Quick installation; cuts with utility knife, PVC cutter or Heyco cutting tool #8340. See page 1-1.

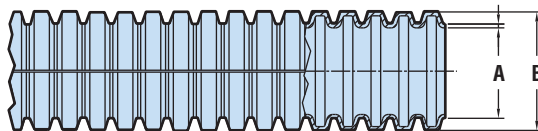

Material	Polyamide 6 Nylon
Temperature Range of Use	-40°C to 115°C (-40°F to 239°F) Continuous -40°C to 190°C (-40°F to 374°F) Intermittent
Flammability Rating	94HB

*Quick Specs*