



# Heyco® Liquid Tight Cordgrips Pigtail™, NPT Hubs

For Flexible Cords. For use in clearance or threaded holes.





| CABLE DIA. RANGE |      |           |      | PART NO.    |             | DESCRIPTION     | PART DIMENSIONS     |      |                       |       |                    |      |                         |     |                      |      |
|------------------|------|-----------|------|-------------|-------------|-----------------|---------------------|------|-----------------------|-------|--------------------|------|-------------------------|-----|----------------------|------|
| Min. Dia.        |      | Max. Dia. |      | Black       | Gray        |                 | A<br>Clearance Hole |      | B<br>Max. O.A. Length |       | C<br>Thread Length |      | D<br>Wrenching Nut Thk. |     | E<br>Wrenching Flats |      |
| in.              | mm.  | in.       | mm.  |             |             | in.             | mm.                 | in.  | mm.                   | in.   | mm.                | in.  | mm.                     | in. | mm.                  |      |
| .069             | 1,8  | .187      | 4,7  | <b>3474</b> | <b>3475</b> | FLEX RLTF 3/8   | .670                | 17,0 | 2.97                  | 75,4  | .53                | 13,5 | .20                     | 5,1 | .75                  | 19,1 |
| .181             | 4,6  | .312      | 7,9  | <b>3254</b> | <b>3255</b> | FLEX LTF 3/8    |                     |      |                       |       |                    |      |                         |     |                      |      |
| .170             | 4,3  | .470      | 11,9 | <b>3251</b> | <b>3252</b> | * FLEX LTF 1/2  | .875                | 22,2 | 4.09                  | 103,9 | .62                | 15,7 | .20                     | 5,1 | .95                  | 24,1 |
| .230             | 5,8  | .546      | 13,9 | <b>3266</b> | <b>3267</b> | * FLEX LLTF 1/2 | .875                | 22,2 | 4.54                  | 115,3 | .62                | 15,7 | .23                     | 5,8 | 1.05                 | 26,7 |
| .250             | 6,4  | .485      | 12,3 | <b>3462</b> | <b>3463</b> | * FLEX RLTF 3/4 | 1.068               | 27,1 | 5.14                  | 130,6 | .63                | 16,0 | .23                     | 5,8 | 1.30                 | 33,0 |
| .450             | 11,4 | .709      | 18,0 | <b>3239</b> | <b>3242</b> | * FLEX LTF 3/4  |                     |      |                       |       |                    |      |                         |     |                      |      |

Standard colors black and gray.

\* UL Listed

- Multiple sizes for cable diameters ranging from .069" (1,8 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with TPE Sealing Gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. This feature is not assessed by UL.
- Flexible Pigtail™ extender prevents sharp bends and extends cable life.
- Suitable for NEMA type 4 and 6 enclosures.
- **Locknuts not included.** For nylon locknut specifications or to order locknuts separately, see page 2-21.
- Consult Heyco for cordgrips molded in other colors.

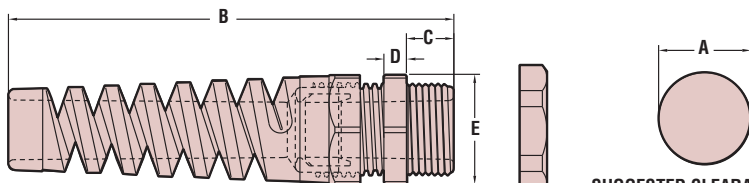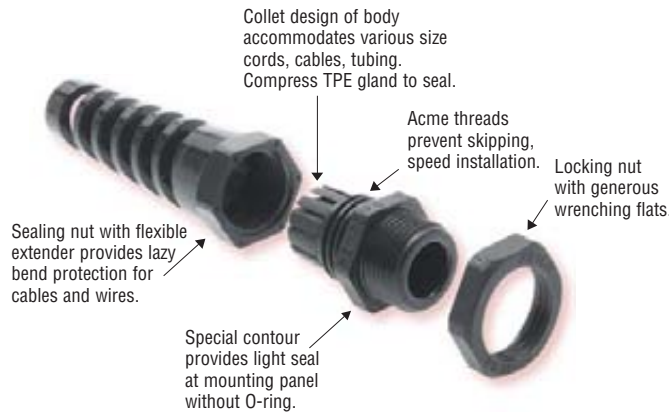

SEALING NUT WITH FLEX-PROTECTOR EXTENDER

SUGGESTED CLEARANCE HOLE FOR NONTHEADED MOUNTING

|                     |  |
|---------------------|--|
| Material            | 6/6 Nylon w/TPE Sealing Gland  |
| Certifications      | <ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>Recognized under the Component Program of Underwriters' Laboratories File E51579</li> <li>CS Certified by Canadian Standards Association File LR93876C</li> </ul> |
| Flammability Rating | 94V-2  |
| Temperature Rating  | Static -40°F (-40°C) to 239°F (115°C)<br>Dynamic -4°F (-20°C) to 212°F (100°C)   |
| IP Rating           | IP 68 (70 PSI, 5 BAR)  |

Quick Specs