



Heyco® Liquid Tight Cordgrips Pigtail™, PG Hubs


For Flexible Cords. For use in clearance or threaded holes.

- Multiple sizes for cable diameters ranging from .064" (1,6 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with TPE gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. This feature is not assessed by UL.
- Flexible Pigtail™ extender prevents sharp bends and extends cable life.
- PG hub threads are steel conduit threads per DIN 40430.
- Suitable for NEMA type 4 and 6 enclosures.
- **Locknuts INCLUDED.**
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS									
Min. Dia.		Max. Dia.		Black	Gray		A Clearance Hole		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Flats	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.064	1,6	.210	5,3	3464	3465	FLEX RLTF 7	.492	12,5	2.44	62,0	.33	8,4	.20	5,1	.59	15,0
.114	2,9	.250	6,4	3237	3238	FLEX LTF 7										
.069	1,8	.187	4,7	3466	3467	FLEX RLTF 9	.599	15,2	2.77	70,4	.34	8,6	.20	5,1	.75	19,1
.181	4,6	.312	7,9	3240	3241	FLEX LTF 9										
.069	1,8	.260	6,6	3468	3469	FLEX RLTF 11	.733	18,6	3.44	87,4	.39	9,9	.20	5,1	.86	21,8
.230	5,8	.395	10,0	3243	3244	FLEX LTF 11										
.170	4,3	.450	11,4	3246	3247	*FLEX LTF 13.5	.804	20,4	3.88	98,6	.41	10,4	.20	5,1	.95	24,1
.230	5,8	.546	13,9	3249	3250	*FLEX LTF 16	.886	22,5	4.36	110,7	.45	11,4	.23	5,8	1.05	26,7
.250	6,4	.485	12,3	3478	3479	*FLEX RLTF 21	1.115	28,3	5.03	127,8	.52	13,2	.23	5,8	1.30	33,0
.450	11,4	.709	18,0	3245	3248	*FLEX LTF 21										

Standard colors black and gray.

* UL Listed

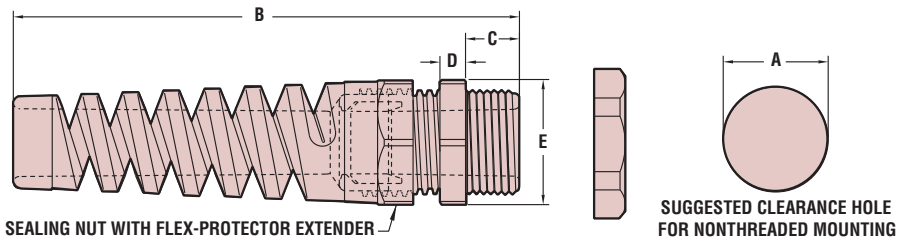

Quick Specs

Material	6/6 Nylon w/TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories File E51579 Recognized under the Component Program of Underwriters' Laboratories File E51579 Certified by Canadian Standards Association File LR93876C
Flammability Rating	94V-2
Temperature Rating	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)