



# Heyco® -Tite Liquid Tight Cordgrips Pigtail™, PG Hubs

For Flexible Cords. For use in clearance or threaded holes.


The Ultimate in Liquid Tight Strain Relief Protection



CABLE DIA. RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS									
Min. Dia.		Max. Dia.		Black	Gray		A Clearance Hole		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Flats	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.065	1,7	.220	5,6	M3464	M3465	RLTCG 7 FLEX	.492	12,5	2,44	62,0	.32	8,1	.21	5,3	.63	16,0
.115	2,9	.250	6,4	M3237	M3238	LTCG 7 FLEX										
.065	1,7	.187	4,7	M3466	M3467	RLTCG 9 FLEX	.599	15,2	2,77	70,4	.32	8,1	.21	5,3	.83	21,0
.105	2,7	.312	7,9	M3240	M3241	LTCG 9 FLEX										
.069	1,8	.250	6,6	M3468	M3469	RLTCG 11 FLEX	.733	18,6	3,46	87,9	.38	9,7	.21	5,3	.94	23,9
.230	5,8	.395	10,0	M3243	M3244	LTCG 11 FLEX										
.095	2,4	.260	6,6	M4526	M4527	*RLTCG 13 FLEX	.804	20,4	3,89	98,8	.41	10,4	.21	5,3	.98	24,9
.170	4,3	.450	11,4	M3246	M3247	*LTCG 13 FLEX										
.180	4,6	.440	11,2	M4528	M4529	*RLTCG 16 FLEX	.886	22,5	4,37	111,0	.44	11,2	.25	6,4	1.06	26,9
.230	5,8	.546	13,9	M3249	M3250	*LTCG 16 FLEX										
.250	6,4	.485	12,3	M3478	M3479	*RLTCG 21 FLEX	1.115	28,3	5,04	128,0	.52	13,2	.25	6,4	1.30	33,0
.485	12,3	.709	18,0	M3245	M3248	*LTCG 21 FLEX										

Standard colors black and gray.

\*UL Listed. All others Recognized under Components Program of Underwriters' Laboratories.

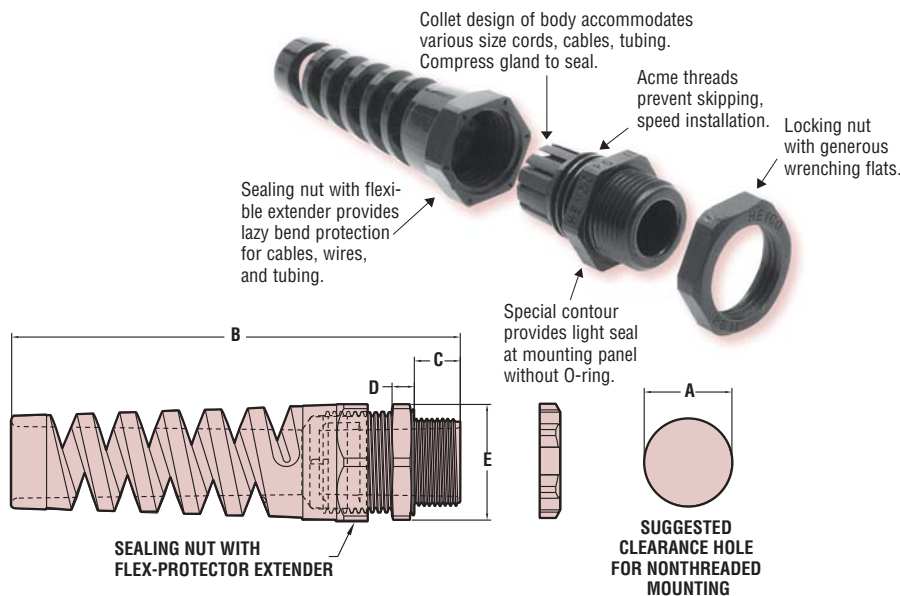

- Multiple sizes for cable diameters ranging from .065" (1,7 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on this cable.
- Integral Sealing Ring ensures a superior seal at mounting locations every time.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. This feature is not assessed by UL.
- Flexible Pigtail™ extender prevents sharp bends and extends cable life.
- Suitable for NEMA 6 and 6P enclosures.
- **Locknuts INCLUDED.**
- Consult Heyco for cordgrips molded in other colors.

<b>Materials</b>	6/6 Nylon w/Buna N Sealing Gland
<b>Certifications</b>	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>Recognized under Components Program of Underwriters' Laboratories File E51579</li> <li>CP Certified by Canadian Standard Association File LR93876C</li> </ul>
<b>Flammability Rating</b>	94V-2
<b>Temperature Rating</b>	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
<b>IP Rating</b>	IP 68 (70 PSI, 5 BAR)

Quick Specs