




# Heyco Metal Liquid Tight Cordgrips NPT Hubs

Nickel-Plated Brass Construction for Superior Protection of Flexible Cables



- Multiple sizes for cable diameters ranging from .118” (3,0 mm) to 2.047” (52,0 mm).
- We recommend using the smallest cordgrip that accommodates your cable size.
- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- Long NPT threads provide additional threads for easy locknut assembly.
- Sealing gland is molded in Thermoplastic Polymer Elastomer Material.
- **Locknuts not included.** For metal locknut specifications or to order locknuts separately, see page 2-22.

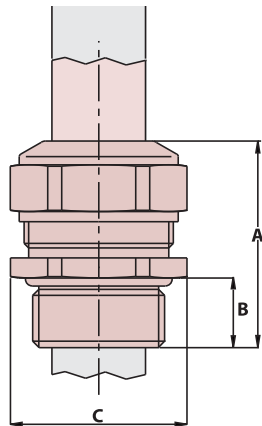

CABLE DIA. RANGE				PART NO.	Thread Size	Clearance Hole		PART DIMENSIONS					
Minimum		Maximum						A Max. O.A. Length		B Thread Length		C Wrenching Flat Size	
in.	mm.	in.	mm.		in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.118	3,0	.157	4,0	<b>4560</b>	NPT 1/8	.445	11,3	.905	23,0	.315	8,0	.512	13,0
.157	4,0	.236	6,0	<b>4561</b>	NPT 1/8	.445	11,3	.905	23,0	.315	8,0	.512	13,0
.138	3,5	.197	5,0	<b>4562</b>	NPT 1/4	.540	13,7	1.142	29,0	.472	12,0	.591	15,0
.197	5,0	.256	6,5	<b>4563</b>	NPT 1/4	.540	13,7	1.142	29,0	.472	12,0	.591	15,0
.256	6,5	.315	8,0	<b>4564</b>	NPT 1/4	.540	13,7	1.142	29,0	.472	12,0	.591	15,0
.138	3,5	.177	4,5	<b>4565</b>	NPT 3/8	.670	17,0	1.260	32,0	.472	12,0	.709	18,0
.177	4,5	.236	6,0	<b>4566</b>	NPT 3/8	.670	17,0	1.260	32,0	.472	12,0	.709	18,0
.236	6,0	.315	8,0	<b>4567</b>	NPT 3/8	.670	17,0	1.260	32,0	.472	12,0	.709	18,0
.315	8,0	.413	10,5	<b>4568</b>	NPT 3/8	.670	17,0	1.260	32,0	.472	12,0	.709	18,0
.236	6,0	.315	8,0	<b>4569</b>	NPT 1/2	.875	22,2	1.417	36,0	.590	15,0	.945	24,0
.315	8,0	.433	11,0	<b>4570</b>	NPT 1/2	.875	22,2	1.417	36,0	.590	15,0	.945	24,0
.433	11,0	.590	15,0	<b>4571</b>	NPT 1/2	.875	22,2	1.417	36,0	.590	15,0	.945	24,0
.374	9,5	.492	12,5	<b>4572</b>	NPT 3/4	1.068	27,1	1.575	40,0	.590	15,0	1.181	30,0
.492	12,5	.630	16,0	<b>4573</b>	NPT 3/4	1.068	27,1	1.575	40,0	.590	15,0	1.181	30,0
.630	16,0	.807	20,5	<b>4574</b>	NPT 3/4	1.068	27,1	1.575	40,0	.590	15,0	1.181	30,0
.551	14,0	.669	17,0	<b>4575</b>	NPT 1	1.375	34,9	1.890	48,0	.787	20,0	1.417	36,0
.669	17,0	.827	21,0	<b>4576</b>	NPT 1	1.375	34,9	1.890	48,0	.787	20,0	1.417	36,0
.827	21,0	1.004	25,5	<b>4577</b>	NPT 1	1.375	34,9	1.890	48,0	.787	20,0	1.417	36,0
.787	20,0	.945	24,0	<b>4578</b>	NPT 1-1/4	1.680	42,7	2.008	51,0	.787	20,0	1.811	46,0
.945	24,0	1.122	28,5	<b>4579</b>	NPT 1-1/4	1.680	42,7	2.008	51,0	.787	20,0	1.811	46,0
1.122	28,5	1.299	33,0	<b>4580</b>	NPT 1-1/4	1.680	42,7	2.008	51,0	.787	20,0	1.811	46,0
1.142	29,0	1.299	33,0	<b>4581</b>	NPT 1-1/2	1.920	48,8	2.205	56,0	.787	22,0	2.165	55,0
1.299	33,0	1.457	37,0	<b>4582</b>	NPT 1-1/2	1.920	48,8	2.205	56,0	.866	22,0	2.165	55,0
1.457	37,0	1.614	41,0	<b>4583</b>	NPT 1-1/2	1.920	48,8	2.205	56,0	.866	22,0	2.165	55,0
1.378	35,0	1.575	40,0	<b>4584</b>	NPT 2	2.395	60,8	2.323	59,0	.866	22,0	2.756	70,0
1.575	40,0	1.811	46,0	<b>4585</b>	NPT 2	2.395	60,8	2.323	59,0	.866	22,0	2.756	70,0
1.811	46,0	2.047	52,0	<b>4586</b>	NPT 2	2.395	60,8	2.323	59,0	.866	22,0	2.756	70,0

Quick Specs

**Material** Nickel-Plated Brass w/TPE sealing gland  
**Certifications** Certified by UL for Compliance with both Canadian and U.S. requirements Under File E51579.  
 Recognized under the Component Program of Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements.  
**Temperature Rating** -40°F (-40°C) to 248°F (120°C)  
**IP Rating** IP 68