




Heyco Metal Liquid Tight Cordgrips PG Hubs

Nickel-Plated Brass Construction for Superior Protection of Flexible Cables



CABLE DIA. RANGE				PART NO.	Thread Size	Clearance Hole		PART DIMENSIONS					
Minimum		Maximum						A Max. O.A. Length		B Thread Length		C Wrenching Flat Size	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.
.138	3,5	.197	5,0	4530	PG 7	.50	12,7	1.063	27,0	.394	10,0	.590	15,0
.197	5,0	.256	6,5	4531	PG 7	.50	12,7	1.063	27,0	.394	10,0	.590	15,0
.256	6,5	.315	8,0	4532	PG 7	.50	12,7	1.063	27,0	.394	10,0	.590	15,0
.138	3,5	.177	4,5	4533	PG 9	.61	15,5	1.181	30,0	.394	10,0	.709	18,0
.177	4,5	.236	6,0	4534	PG 9	.61	15,5	1.181	30,0	.394	10,0	.709	18,0
.236	6,0	.315	8,0	4535	PG 9	.61	15,5	1.181	30,0	.394	10,0	.709	18,0
.315	8,0	.413	10,5	4536	PG 9	.61	15,5	1.181	30,0	.394	10,0	.709	18,0
.157	4,0	.216	5,5	4537	PG 11	.748	19,0	1.220	31,0	.394	10,0	.827	21,0
.216	5,5	.335	8,5	4538	PG 11	.748	19,0	1.220	31,0	.394	10,0	.827	21,0
.335	8,5	.472	12,0	4539	PG 11	.748	19,0	1.220	31,0	.394	10,0	.827	21,0
.236	6,0	.315	8,0	4540	PG 13.5	.827	21,0	1.220	31,0	.394	10,0	.945	24,0
.315	8,0	.433	11,0	4541	PG 13.5	.827	21,0	1.220	31,0	.394	10,0	.945	24,0
.433	11,0	.590	15,0	4542	PG 13.5	.827	21,0	1.220	31,0	.394	10,0	.945	24,0
.236	6,0	.315	8,0	4543	PG 16	.906	23,0	1.220	31,0	.394	10,0	.945	24,0
.315	8,0	.433	11,0	4544	PG 16	.906	23,0	1.220	31,0	.394	10,0	.945	24,0
.433	11,0	.590	15,0	4545	PG 16	.906	23,0	1.220	31,0	.394	10,0	.945	24,0
.374	9,5	.492	12,5	4546	PG 21	1.142	29,0	1.457	37,0	.472	12,0	1.181	30,0
.492	12,5	.630	16,0	4547	PG 21	1.142	29,0	1.457	37,0	.472	12,0	1.181	30,0
.630	16,0	.807	20,5	4548	PG 21	1.142	29,0	1.457	37,0	.472	12,0	1.181	30,0
.630	16,0	.748	19,0	4549	PG 29	1.476	37,5	1.575	40,0	.472	12,0	1.496	38,0
.748	19,0	.905	23,0	4550	PG 29	1.476	37,5	1.575	40,0	.472	12,0	1.496	38,0
.905	23,0	1.083	27,5	4551	PG 29	1.476	37,5	1.575	40,0	.472	12,0	1.496	38,0
.846	21,5	1.024	26,0	4552	PG 36	1.858	47,2	1.850	47,0	.591	15,0	1.969	50,0
1.024	26,0	1.201	30,5	4553	PG 36	1.858	47,2	1.850	47,0	.591	15,0	1.969	50,0
1.201	30,5	1.378	35,0	4554	PG 36	1.858	47,2	1.850	47,0	.591	15,0	1.969	50,0
1.142	29,0	1.299	33,0	4555	PG 42	2.138	54,3	1.929	49,0	.591	15,0	2.156	55,0
1.299	33,0	1.457	37,0	4556	PG 42	2.138	54,3	1.929	49,0	.591	15,0	2.156	55,0
1.457	37,0	1.654	42,0	4557	PG 42	2.138	54,3	1.929	49,0	.591	15,0	2.156	55,0

- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- We recommend using the smallest cordgrip that accommodates your cable size.
- Sizes PG 7 through PG 42 accommodate various cable diameters.
- Long PG threads provide additional threads for easy locknut assembly.
- Sealing gland is molded in Thermoplastic Polymer Elastomer Material.
- **Locknuts not included.** For metal locknut specifications or to order locknuts separately, see page 2-22.

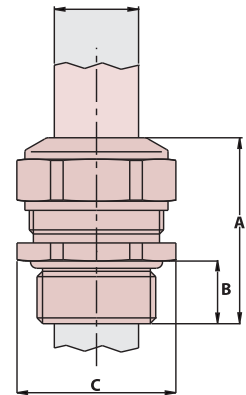

Material Nickel-Plated Brass w/TPE sealing gland

Certifications Certified by UL for Compliance with both Canadian and U.S. requirements under File E51579.

Recognized under the Component Program of Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements.

Temperature Rating -40°F (-40°C) to 248°F (120°C)

IP Rating IP 68

Quick Specs