




## Heyco® PG Thread Taps

For Steel Conduit Threads per DIN 40430

- Use a starting tap for through-hole applications.
- For blind holes, thread first with a starting tap; finish bottoming the threads with a finishing tap.
- Flank angle 80°.
- Made of high-speed steel with ground threads for greater accuracy to assure optimum performance.
- Suitable for cutting alloy steel, bronze, and stainless.

THREAD TYPE AND SIZE	TAP DRILL DIAMETER mm.	DESCRIPTION	PART NO.		PART DIMENSIONS		
			Starting	Finishing	Major Diameter mm.	Overall Length mm.	Thread mm.
PG 7	11,5	PG T 7	0150	0151	12,5	63,0	20,0
PG 9	14,0	PG T 9	0153	0154	15,2	70,0	20,0
PG 11	17,3	PG T 11	0156	0157	18,6	80,0	22,0
PG 13.5	19,0	PG T 13.5	0159	0160	20,4	80,0	22,0
PG 16	21,3	PG T 16	0162	0163	22,5	80,0	22,0
PG 21	27,0	PG T 21	0165	0166	28,3	90,0	22,0
PG 29	35,5	PG T 29	0168	0169	37,0	110,0	25,0




## Heyco® Sealing Washers

- For use with Heyco Liquid Tight Fittings and Liquid Tight Cordgrips.
- Liquid tight, dust tight, and oil tight at enclosure.
- Suitable for wet locations requiring a separate gasket between the box and fitting due to imperfections in the box.
- Also suitable for other panel or panel sealing applications.
- Easy to install since washers seal off on the perimeter, not on the connector threads.
- Special double sealing ridges compensate for minor unevenness at enclosure.

Will Fit These Electrical Fitting Trade Sizes-NPT	PART NO. Black	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Outside Diameter		C Thickness	
			in.	mm.	in.	mm.	in.	mm.
1/4	3258	SW 1/4	.540	13,7	.796	20,2	.125	3,2
3/8	3259	SW 3/8	.670	17,1	1.002	25,5	.125	3,2
1/2	3260	SW 1/2	.820	20,8	1.240	31,5	.125	3,2
3/4	3261	SW 3/4	1.030	26,2	1.500	38,1	.135	3,4
1	3262	SW 1	1.281	32,5	1.770	45,0	.175	4,4
1-1/4	3264	SW 1-1/4	1.660	42,2	1.990	50,7	.160	4,1

Standard color black.

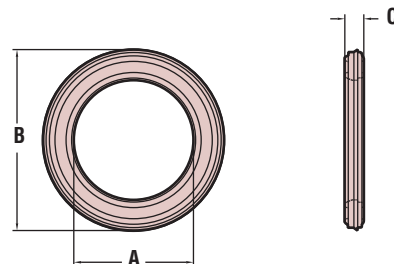

Quick Specs

Sealing Washers	
Material	Thermoplastic Elastomer
Flammability Rating	94V-0