




# Heyco® RDD Right Angle Lockit™ Strain Relief Bushings

For Flat Cables

WILL FIT THESE CABLES				PANEL DIMENSIONS				PART NO.	DESCRIPTION
UL Type Designation	AWG Conductors	Approximate Size		Mounting Hole Size		Thickness			
		in.	mm.	in.	mm.	in.	mm.		
SPT-1	18/2	.105 x .222	2,7 x 5,6	.625 w/ .550 flats	15,9 w/ 14,0 flats	.032 .040 .048	0,8 1,1 1,2	<b>1806</b>	RDD 100A-90
	18/3	.116 x .315	2,9 x 8,0			.063 .099	1,6 2,5		
HPN SPT-1 SPT-2	16/3	.116 x .315	2,9 x 8,0	.625 w/ .550 flats	15,9 w/ 14,0 flats	.032 .040 .048	0,8 1,1 1,2	<b>1808</b>	RDD 100-90
	18/2	.160 x .300	4,1 x 7,6						
	18/3	.160 x .300	4,1 x 7,6						
HPN SPT-2 SPT-3	16/3	.160 x .370	4,1 x 7,6	.875 w/ .770 flats	22,2 w/ 19,6 flats	.032 .063 .099	0,8 1,6 2,5	<b>1810</b>	RDD 200-90
	18/3	.240 x .420	6,1 x 10,7						
	14/2	.240 x .420	6,1 x 10,7						

Standard color black. Consult Heyco for white and other colors.

- Automated application equipment speeds assembly and lowers costs while reducing or eliminating repetitive manual assembly motions.
- See page 3-1 for Heyco Automated Pre-Assembly Equipment.
- Installs easily with fingertip pressure into a standard round or Double "D" hole.
- Assembly friendly! Independent of insertion into the panel, RDD Right Angle Lockit Strain Reliefs self-lock onto the cable. Thus, they may be preassembled offline for final assembly at a later time or remote location, for lower installed cost!
- Multiple panel locking steps secure lockit strain relief into range of panel thicknesses.
- See page 3-23 for matching plugs which can be used to fill blank/unused mounting holes.

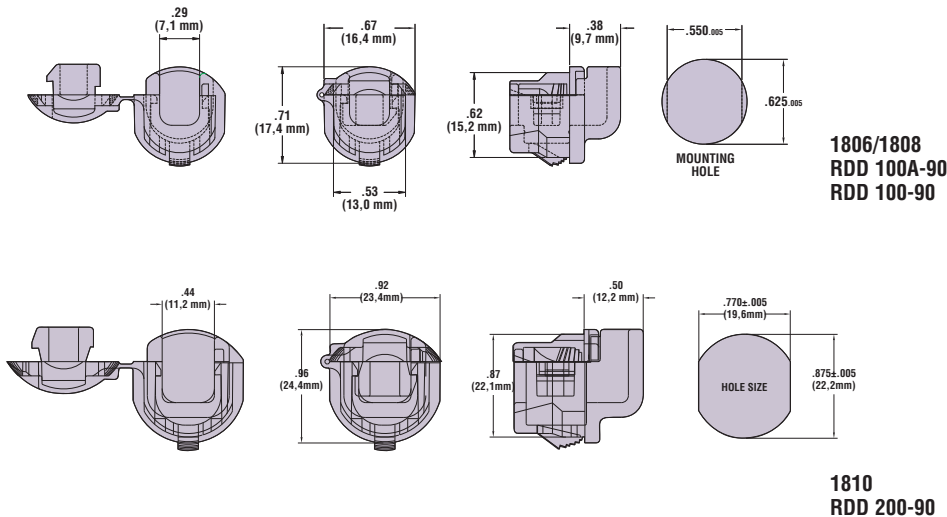

**1806/1808**  
RDD 100A-90  
RDD 100-90

**1810**  
RDD 200-90

**Material** 6/6 Nylon  
**Certifications** Recognized under the Component Program of Underwriters' Laboratories File E15331 (far exceeds UL's 35# pull-out test).  
 Certified by the Canadian Standards Association File LR8919  
**Flammability Rating** 94V-2  
**Material Temperature Index** 257° (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

*Quick Specs*