



Heyco® Zinc Die-Cast Box Connectors

Combination Connector




TRADE SIZE	NOMINAL MOUNTING HOLE DIAMETER		WILL FIT THESE CABLES*			PART NO.	DESCRIPTION	PART DIMENSIONS					
	in.	mm.	Flexible Metallic Conduit	Armored **	Non-Metallic Sheathed			A		A		B	
								Minimum Wire		Maximum Wire		Overall Length	
								in.	mm.	in.	mm.	in.	mm.
3/8 **	.875	22,2	3/8	14/2, 14/3, 14/4 12/2, 12/3, 12/4	14/2, 14/3, 12/2, 12/3	3029	551	.18	4,6	.63	16,0	.92	23,4

* Gauge/Conductors, except FMC.

**1/2" K.O.

- Also fits corrugated MC at .510" (13,0 mm) diameter, smooth MC at .345" (8,8 mm) to .525" (13,3 mm) diameter.
- Listed under Underwriters' Laboratories File 103540.
- Certified by Canadian Standards Association File LR18130.

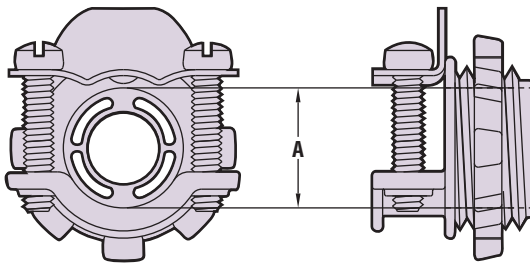

Box Spacer

TRADE SIZE	NOMINAL HOLE MOUNTING DIAMETER		PART NO.	DESCRIPTION	PART DIMENSIONS					
	in.	mm.			A		B		C	
					in.	mm.	in.	mm.	in.	mm.
1/2	.875	22,2	9840	SP1	.60	15,2	1.12	28,4	.28	7,1



- Provides a connecting link between boxes, panels or chassis.
- Space boxes 5/16" (7,9 mm) apart.
- Die-cast locknut included.
- Certified by Canadian Standards Association File LR72095.

