





Heyco® Removable Snap-In Ratcheting Strain Relief

For Round and Double D Holes




WILL FIT THESE CABLES Cross Section	Approximate Size		PANEL DIMENSIONS				PART NO. Black	DESCRIPTION	BODY LENGTH	
	in.	mm.	Mounting Hole Size		Thickness				in.	mm.
Round, Flat or Multiple	.115 - .575	2,9 - 14,6	.875 w/ .770 flats	22,2 w/ 19,6 flats	.125	3,2	1280	RSR-875	1.000	25,4

- Assembly friendly! Independent of insertion into the panel, the Ratcheting Strain Relief self-locks onto the cable. Thus, it may be pre-assembled offline for final assembly at a later time or remote location, for lower installed cost.
- Ratcheting Strain Relief can be easily removed by inserting standard snap ring pliers with .040" tips (Heyco PN 0054) into the two holes on the part (see drawing) and spread part open.
- Installs easily with fingertip pressure into a standard round or Double "D" hole.
- Unique wire locking ratchet allows for generous wire range from .115" (2,9 mm) to .575" (14,6 mm).
- Can be used for one cable or multiple cables (round or flat wire).
- Consult Heyco for other wire types and sizes.

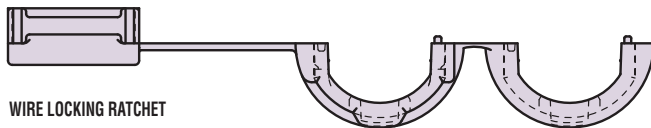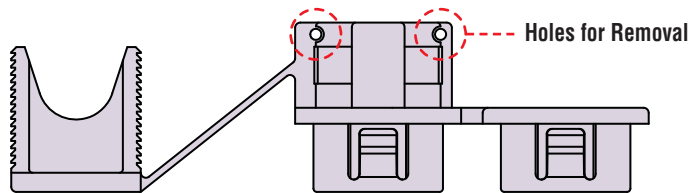

WIRE LOCKING RATCHET

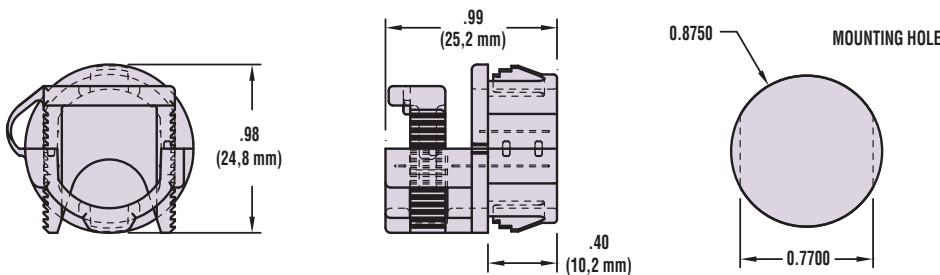

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331 Certified by Canadian Standards Association File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs