




Heyco® Snub Bushings

- Provides insulation plus light strain relief.
- Suitable for 1/8" (3,2 mm) to 1/4" (6,4 mm) diameter cable, tubing or hose.
- The ID opens to accept the cable then closes firmly when installed into the mounting hole.

| PANEL DIMENSIONS | | | | APPROXIMATE CABLE DIAMETER ACCOMMODATED | | PART NO. | DESCRIPTION | PART DIMENSIONS | | | |
|-------------------|-----|------------------------|------|---|-----|-------------|-------------|-----------------|------|------------------|------|
| Maximum Thickness | | Mounting Hole Diameter | | | | | | A Head Diameter | | B Overall Height | |
| in. | mm. | in. | mm. | in. | mm. | Black | | in. | mm. | in. | mm. |
| .125 | 3,2 | .375 | 9,5 | 1/8 | 3,2 | 2034 | K 375-125 | .46 | 11,7 | .42 | 10,7 |
| .125 | 3,2 | .437 | 11,1 | 3/16 | 4,8 | 2047 | K 437-187 | .47 | 11,9 | .44 | 11,2 |
| .125 | 3,2 | .500 | 12,7 | 1/4 | 6,4 | 2057 | K 500-250 | .56 | 14,2 | .44 | 11,2 |

Standard color black. Consult Heyco for white and other colors.

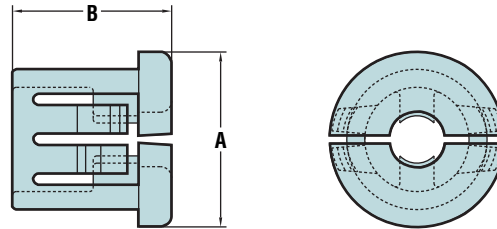

Quick Specs

Material
Certifications



6/6 Nylon
Recognized under the Component Program of Underwriters' Laboratories, File E15331



Certified by Canadian Standards Association, File LR8919

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)