




Heyco® Open/Closed Universal Bushings

- Split design allows side entry and encirclement of preassembled harnesses, power cords, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- Parts can be assembled into holes that already contain cables or tubing.
- Only fingertip pressure required to snap-lock the bushing into its mounting hole.
- Flexible shutters adjust to accommodate and support any shape from .125" to a maximum diameter of 1.062".
- Absorbs vibration, cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Available in multiple sizes for use in .500" (12,7 mm) to 1.500" (38,1 mm) diameter holes.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness in.	Maximum Thickness mm.	Mounting Hole Diameter in.	Mounting Hole Diameter mm.			Black	Max. Inside Diameter	A Head Diameter		B Overall Height	
.125	3,2	.500	12,7	2055SP	OCUB-500	.312	7,6	.562	14,3	.385	9,8
.125	3,2	.625	15,9	2077SP	OCUB-625	.437	11,1	.718	18,2	.406	10,3
.125	3,2	.750	19,0	2089SP	OCUB-750	.500	12,7	.812	20,6	.406	10,3
.125	3,2	.875	22,2	2119SP	OCUB-875	.562	14,3	.921	23,4	.406	10,3
.125	3,2	1.000	25,4	2137SP	OCUB-1000	.750	19,0	1.062	27,0	.406	10,3
.125	3,2	1.093	27,8	2157SP	OCUB-1093	.812	20,6	1.187	30,2	.406	10,3
.125	3,2	1.250	31,8	2196SP	OCUB-1250	.937	23,8	1.468	37,3	.406	10,3
.125	3,2	1.375	34,9	2184SP	OCUB-1375	1.000	25,4	1.468	37,3	.406	10,3
.125	3,2	1.500	38,1	2213SP	OCUB-1500	1.062	26,9	1.578	40,1	.421	10,7

Standard color black. Consult Heyco for white and other colors.
Locking fingers in fractional increments up to the maximum panel thickness.

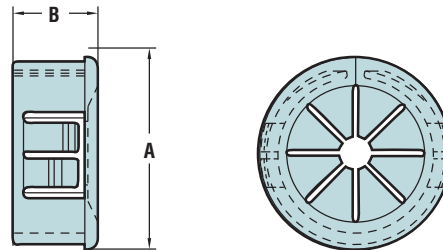

Quick Specs

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by the Canadian Standards Association, File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)