




## Heyco® Metric Dome Plugs

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.
.098	2,5	.630	16,0	2128	2130	MDP 16	.728	18,5	.406	10,3
.098	2,5	.787	20,0	2131	2132	MDP 20	.890	22,6	.406	10,3
.098	2,5	.984	25,0	2133	2134	MDP 25	1.173	29,8	.453	11,5
.098	2,5	1.260	32,0	2135	2136	MDP 32	1.388	35,3	.453	11,5

Standard color black. Consult Heyco for other colors.  
Approximate Head Thickness: .063" (1,6 mm).




- Closes unneeded panel holes.
- Convex, matte finish head tapers to a thin edge.
- Multiple sizes for use in .630" (16,0 mm) to 1.260" (32,0 mm) diameter holes. For other metric sizes, consult Heyco.
- Locks firmly into panel up to .098" (2,5 mm) thick.
- Quick and easy installation.

## Heyco® Insulation Plug

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.
No Max.		1.000	25,4	3149	3150	IPW 1	1.234	31,3	.687	17,5

Standard color black. Consult Heyco for other colors.

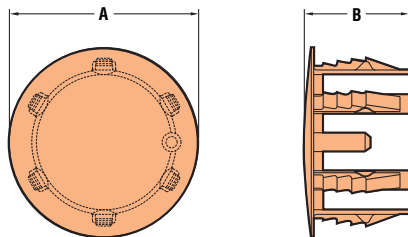

- Fills holes in surfaces of unspecified thickness including cabinetry, furniture, display cases—even masonry.
- Closes cavity-fill insulation holes in wood and other type siding.
- Convex, matte finish head blends with various surfaces.
- Holds securely in hole.
- Quick and easy installation with fingertip pressure (no tool required).
- Molded of type 6/6 Nylon. Flammability classification 94V-2.
- Quick Specs below do not apply.



Material Certifications



6/6 Nylon  
Recognized under the Component Program of Underwriters' Laboratories, File E15331



Certified by Canadian Standards Association, File LR8919

Flammability Rating

94V-2

Material Temperature Index

257° (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs