




## Heyco® Thick Panel Vent Plugs

PANEL DIMENSIONS				PART NO.		DESCRIPTION	No. of Vent Holes	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White			A		B	
in.	mm.	in.	mm.			Head Diameter in.	mm.	Overall in.	mm.	Height mm.	
.250	6,4	.500	12,7	<b>3010</b>	<b>3011</b>	VPT-500	4	.578	14,7	.562	14,3
.250	6,4	.625	15,9	<b>3013*</b>	<b>3014*</b>	VPT-625	5	.734	18,7	.562	14,3
.250	6,4	.750	19,1	<b>2426*</b>	<b>2427*</b>	VPT-750	8	.906	23,0	.562	14,3
.250	6,4	.875	22,2	<b>3152</b>	<b>3153</b>	VPT-875	9	1.015	25,8	.562	14,3
.250	6,4	1.000	25,4	<b>3154</b>	<b>3155</b>	VPT-1000	9	1.203	30,6	.562	14,3
.250	6,4	1.093-1.125	27,8-28,6	<b>3032</b>	<b>3033</b>	VPT-1093	9	1.218	30,9	.562	14,3
.250	6,4	1.187	30,2	<b>3160</b>	<b>3161</b>	VPT-1187	10	1.31	33,3	.562	14,3
.250	6,4	1.250	31,7	<b>3034</b>	<b>3035</b>	VPT-1250	10	1.375	34,9	.562	14,3
.250	6,4	1.375	34,9	<b>3036</b>	<b>3037</b>	VPT-1375	11	1.500	38,1	.562	14,3
.250	6,4	1.500	38,1	<b>3156</b>	<b>3157</b>	VPT-1500	13	1.671	42,4	.562	14,3
.250	6,4	1.750	44,5	<b>3038</b>	<b>3039</b>	VPT-1750	13	1.906	48,4	.562	14,3
.250	6,4	2.000	50,8	<b>3158</b>	<b>3159</b>	VPT-2000	19	2.140	54,4	.579	14,7

Standard color black. Consult Heyco for other colors.  
 Locking fingers in fractional increments up to the maximum panel thickness.  
 Approximate Head Thickness: .063" (1,6 mm). Thickness may vary.

\*Depicts single panel design.

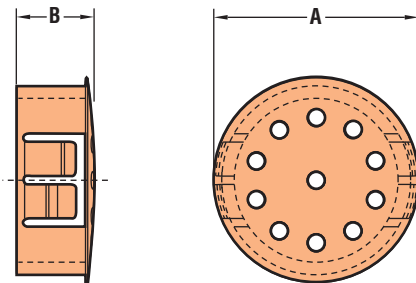

- Convex, matte finish head that tapers to a thin edge.
- Permits the passage of air for ventilation and heat dissipation.
- Locking fingers snap into holes with fingertip pressure for quick and easy installation.
- Withstands a push back force of 35 pounds.
- Available in multiple sizes for use in .500" (12,7 mm) to 2.00" (50,8 mm) diameter holes for panel thickness up to .250" (6,4 mm).

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E51579 Certified by Canadian Standards Association, File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)

*Quick Specs*