




ALL NEW PRODUCTS!

Heyco® Lockett™ Hose Clamps

- Double row of teeth for more secure grip.
- Retainer clip allows clamp to be pre-positioned on hose before final installation.
- Quick and easy installation. Tightens instantly with hand pliers.
- Supertough nylon clamps offer additional clamping strength.
- Outlasts tubing under pressure.
- Lightweight yet resists corrosion, salt water, weak acids, grease, and common solvents. This feature is not assessed by UL certification or testing.
- Non-conductive and non-magnetic.
- No moving pieces to seize or vibrate loose.
- Reusable. Can be removed without cutting.
- Material: 6/6 Nylon
- Flammability Rating: 94HB
- Material Temperature Index: 257°F (125°C)
Maximum temperature on part not to exceed 221°F (105°C)
- Maximum Pressure Rating: 200 psi

EFFECTIVE CLAMP RANGE				PART NO. Black	DESCRIPTION	PART DIMENSIONS			
Minimum Diameter		Maximum Diameter				A Clamp Thickness		B Strap Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.
.344	8,7	.406	10,3	2388	LHC-344	.250	6,4	.080	2,0
.531	13,5	.593	15,1	2391	LHC-531	.250	6,4	.080	2,0
.671	17,0	.812	20,6	2393	LHC-672	.250	6,4	.080	2,0

Standard color black.

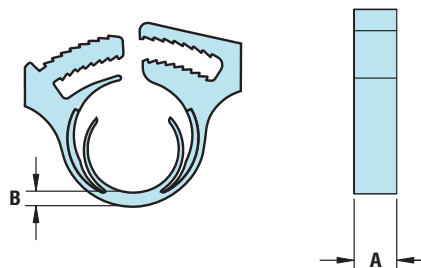

Heyco® Pneumatic Nylon Hose Clamp Hand Air Tool



- Allows for a semi-automated process which increases speed over manual tools.
- Adjustable jaws allow tool to accommodate a wide range of Heyco Hose Clamps.
- Activated by hand lever reducing stress on the hand and the risk of carpal tunnel syndrome associated with repetitive assembly.
- Operates only when lever is depressed.
- Tool operates on standard shop air.

FOR HOSE CLAMPS	AIR TOOL PART NO. INCLUDING JAWS	JAW PART NO.*	
		Upper	Lower
LHC-344	0170	0T83	0T84
LHC-531			
LHC-672			
HC 250			
HC 344			
HC 406			
HC 468			
HC 531			
HC 593			
HC 672			
HC 750			
HC 875			
HC 953			
HC 1031			
HC 1250			
HC 1406			
HC 1593			
HC 1687			
HC 1875			

*Jaw part number if purchased separately.