



Heyco® Wire and Cable Holders

Vertical Orientation—Top Entry

Regular Gate


PART NO.	DESCRIPTION	PART DIMENSIONS					
		A		B		C	
Natural		in.	mm.	in.	mm.	in.	mm.
3600	CH-R-12	.171	4,4	.343	8,7	.484	12,3
3605	CH-R-18	.390	9,9	.578	14,7	.718	18,2
3610	CH-R-27	.750	19,0	.937	23,8	1.062	27,0
3615	CH-R-35	1.062	27,0	1.250	31,7	1.375	35,0

Latch Gate

3620	CH-L-12	.140	3,6	.343	8,7	.484	12,3
3625	CH-L-18	.360	9,1	.575	14,7	.718	18,2
3630	CH-L-27	.718	18,2	.937	23,8	1.000	27,0
3635	CH-L-35	1.031	26,2	1.250	31,7	1.375	35,0

Standard color natural.

Recognized under the Component Program of Underwriters' Laboratories File E54523

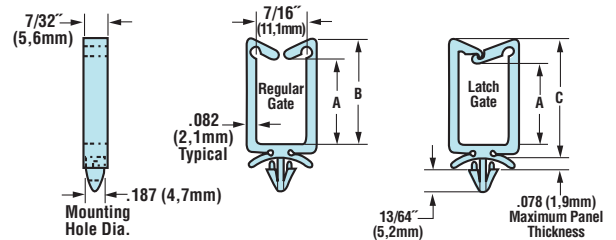

Horizontal Orientation—Side Entry


Regular Gate

PART NO.	DESCRIPTION	PART DIMENSIONS					
		A		B		C	
Natural		in.	mm.	in.	mm.	in.	mm.
3652	CH-R-27-90	.750	19,0	.928	23,6	.62	15,7
3667	CH-R-35-90	1.063	27,0	1.250	31,7	.66	16,7

Latch Gate

3697	CH-L-27-90	.719	18,2	.921	23,4	.66	16,7
3712	CH-L-35-90	1.032	26,2	1.250	31,7	.66	16,7

Standard color natural.

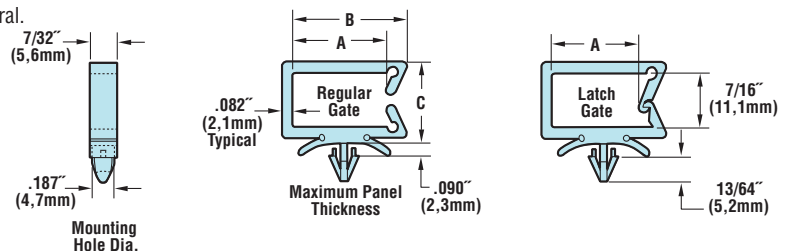

Quick Specs

Material	6/6 Nylon
Flammability Rating	94V-2
Material Temperature Index	185°F (85°C)