




## Heyco® Nylon Arrow Clips

MOUNTING HOLE DIAMETER		PANEL THICKNESS				PART NO.	DESCRIPTION	PART DIMENSIONS							
		Minimum		Maximum				Natural	A Length		B Clip Diameter		C Head Diameter		D Head Height
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.
.118	3,0	.062	1,6	.125	3,2	<b>0315</b>	AC 15	.390	9,9	.150	3,8	.280	7,1	.060	1,5
.130	3,3	.125	3,2	.140	3,6	<b>0313</b>	AC 13	.318	8,1	.162	4,1	.280	7,1	.060	1,5
.131	3,3	.062	1,6	.125	3,2	<b>0302</b>	AC 2	.390	9,9	.162	4,1	.280	7,1	.060	1,5
.145	3,6	.290	7,4	.300	7,6	<b>0314</b>	AC 14	.530	13,5	.196	5,0	.270	6,8	.070	1,8
.151	3,8	.062	1,6	.145	3,7	<b>0304</b>	AC 4	.400	10,2	.180	4,6	.280	7,1	.060	1,5
.182	4,6	.062	1,6	.125	3,2	<b>0301</b>	AC 1	.400	10,2	.225	5,7	.360	9,1	.060	1,5
.182	4,6	.165	4,2	.187	4,7	<b>0311</b>	AC 11	.518	13,1	.206	5,2	.376	9,5	.060	1,5
.182	4,6	.310	7,9	.330	8,4	<b>0306</b>	AC 6	.550	14,0	.225	5,7	.370	9,4	.060	1,5
.213	5,4	.062	1,6	.125	3,2	<b>0307</b>	AC 7	.450	11,4	.220	5,6	.370	9,4	.060	1,5
.213	5,4	.125	3,2	.187	4,7	<b>0305</b>	AC 5	.540	13,7	.248	6,3	.370	9,4	.060	1,5
.250	6,3	.125	3,2	.187	4,7	<b>0309</b>	AC 9	.575	14,6	.290	7,4	.484	12,3	.060	1,5
.250	6,3	.360	9,1	.380	9,7	<b>0316</b>	AC 16	.810	20,6	.245	6,2	.610	15,5	.065	1,6
.320	8,1	.062	1,6	.340	8,6	<b>0317</b>	AC 17	.900	22,9	.375	9,5	.683	17,3	.070	1,8

Standard color natural. For black and other colors, please consult factory.

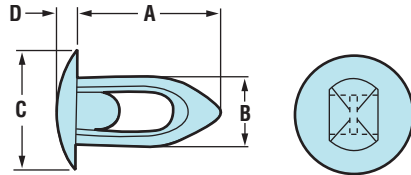


- 6/6 Nylon with a 94V-2 flammability rating; temperature index 257°F (125°C).
- Snaps into mounting holes with fingertip pressure—no tools required.
- Offers a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Hollow body design allows the clip to compress through the mounting hole, then expand back to original shape to lock assembled components securely.
- May be disassembled and reused.
- Vibration, abrasion, and corrosion resistant.

## Heyco® Nylon Push-In Fasteners

MOUNTING HOLE DIAMETER		MAXIMUM PANEL THICKNESS		PART NO.	DESCRIPTION	PART DIMENSIONS							
						Natural	A Overall Length		B Head Diameter		C Lock Length		D Lock Diameter
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.
.093	2,4	.115	2,9	<b>0339</b>	PF 39	.240	6,1	.250	6,4	.085	2,2	.145	3,7
.130	3,3	.190	4,8	<b>0342</b>	PF 42	.320	8,1	.203	5,2	.090	2,3	.180	4,6
.165	4,2	.133	3,4	<b>0350</b>	PF 50	.310	7,9	.343	8,7	.137	3,5	.202	5,1
.180	4,6	.250	6,4	<b>0353</b>	PF 53	.484	12,3	.343	8,7	.174	4,4	.224	5,7
.200	5,1	.156	4,0	<b>0360</b>	PF 60	.359	9,1	.468	11,9	.153	3,9	.228	5,8
.200	5,1	.375	9,5	<b>0361</b>	PF 61	.552	14,0	.343	8,7	.137	3,5	.236	6,0

Standard color natural.

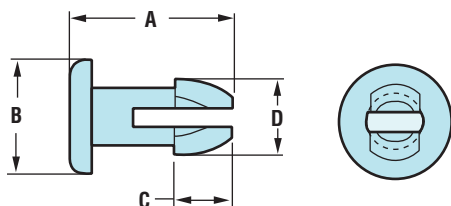

- 6/6 Nylon with a 94V-2 flammability rating; temperature index 257°F (125°C).
- Snaps into mounting holes with fingertip pressure—no tools required.
- Offers a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Slotted leg design allows for both compression through the mounting hole and then expansion back to original shape—to lock assembled components securely.
- May be disassembled and reused.
- Vibration, abrasion, and corrosion resistant.

