

“Stay Connected” with



Solar Power Components

a PennEngineering® Company




## Heyco-Flex™ V Nylon Slit Tubing

**IMPROVED**


NOMINAL DIAMETER	PART NO. Black	DESCRIPTION	PART DIMENSIONS						INSTALLATION TOOL PART NO.
			A Outside Diameter		B Inside Diameter		Wall Thickness Range		
in.			in.	mm.	in.	mm.	in.	mm.	
1/4	<b>1635B</b>	HF5B 1/4	.40-.38	10,2-9,5	.27-.24	6,8-6,0	0.004	0,11	8889
3/8	<b>1637B</b>	HF5B 3/8	.53-.50	13,4-12,6	.38-.34	9,7-8,7			
7/16	<b>1638B</b>	HF5B 7/16	.60-.57	15,2-14,6	.44-.40	11,1-10,1			
1/2	<b>1639B</b>	HF5B 1/2	.70-.66	17,8-16,9	.52-.47	13,1-12,0	0.005	0,12	8890
5/8	<b>1641B</b>	HF5B 5/8	.84-.81	21,3-20,5	.64-.60	16,2-15,3			
3/4	<b>1642B</b>	HF5B 3/4	.94-.91	23,9-23,1	.78-.75	19,9-19,0			8891
1	<b>1643B</b>	HF5B 1	1.29-1.25	32,9-31,7	1.04-.99	26,5-25,2			8892
1-1/4	<b>1646B</b>	HF5B 1-1/4	1.50-1.45	38,1-36,7	1.26-1.20	31,9-30,5	0.006	0,15	
1-1/2	<b>1649B</b>	HF5B 1-1/2	1.95-1.87	49,5-47,4	1.65-1.57	41,8-39,8			

Standard color black.

- Slit design allows side entry and encirclement of preassembled harnesses and capillary tubes.
- Unique slit design allows for wire breakouts.
- Heyco-Flex V is lightweight and flexible, yet durable enough to meet your wire management requirements.
- Multiple sizes 1/4" to 1-1/2".
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- Quick installation; cuts with utility knife, PVC cutter or Heyco cutting tool #8340.



Heyco-Flex™ V Slit Tubing - Nylon

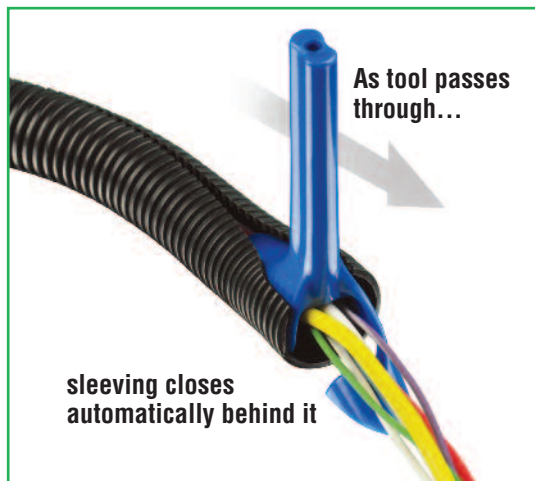

**Easily install wire bundles**

Material	Nylon 6
Flammability Rating	94HB (not UL rated)
Temperature Range	-40°F (-40°C) to 257°F (125°C) Continuous -40°F (-40°C) to 300°F (149°C) Intermittent

*Quick Specs*