


Heyco® Grommet Channels

TPE "DS" Channel

FIT PANEL THICKNESS RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS						
Minimum		Maximum				A Overall Height	B Length					
in.	mm.	in.	mm.				in.	mm.	ft.	M.		
4' (1.2 M) Strip				Gray								
.031	0,8	.062	1,6	12430	DS-062-48"	.30	7,6					
.020	0,5	.125	3,2	12431	DS-125-48"	.38	9,5			4	1.2	
.031	0,8	.188	4,8	12432	DS-188-48"	.50	12,7					
.045	1,1	.250	6,4	12433	DS-250-48"	.63	15,9					
100' (30.5 M) Roll												
.031	0,8	.062	1,6	12430R	DS-062-1200"	.30	7,6			100	30.5	
.020	0,5	.125	3,2	12431R	DS-125-1200"	.38	9,5					

Standard color gray.

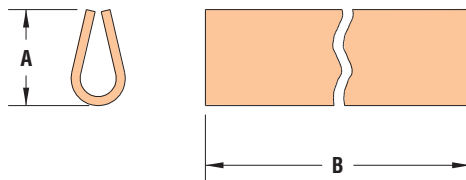


- This flexible Grommet Channel is ideal for protecting panel edges from being damaged.
- For use as wear strips, non-abrasive edging, noise-reducing conveyor strips, framing, or to protect from sharp edges.
- Features built-in lubricant for reduced friction and longer part life.

Polystyrene Channel - 4' (1.2 M) Strip

FIT PANEL THICKNESS		PART NO. White	DESCRIPTION	PART DIMENSIONS								STYLE	
in.	mm.			A Overall Height	B Top Width		C Bottom Width		D Length				
			in.	mm.	in.	mm.	in.	mm.	in.	mm.	ft.	M.	
.050	1,3	12443	PCH-015X050-48"	.44	11,1	.02	0,4	.05	1,3				1
.141	3,6	12444	PCH-020X141-48"	.56	14,3	.02	0,5	.14	3,6	4	1.2		2
.250	6,4	12445	PCH-200X250-48"	.38	9,5	.20	5,1	.25	6,4				1

Standard color white.

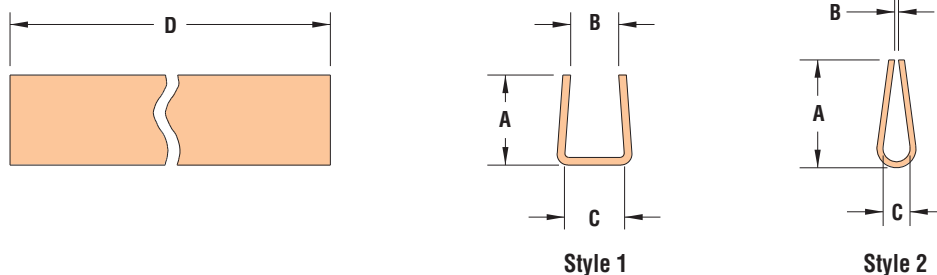

- Binds and frames sharp edges.
- May be cut to desired lengths.
- Available by special order only, consult Heyco.

Material: PA66/6 MDS Filled Nylon or High Impact Polystyrene
 Flammability Rating: 94HB
 Temperature Range: -40°F (-40°C) to 149°F (65°C) (DS Series)
 -4°F (-20°C) to 122°F (50°C) (PCH Series)

Quick Specs