

“Stay Connected” with



HEYware Products

a PennEngineering® Company




HEYClip™ Locking Releasable Wire Clips - Adjustable

Arrowhead Mount

MAXIMUM BUNDLE DIAMETER RANGE				PART NO.			DESCRIPTION	PART DIMENSIONS						PANEL THICKNESS			
A		Natural	Black	Natural	Black	Natural		UL 94V-0	B		C		D*		Minimum		Maximum
Minimum	Maximum						in.		mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
.31	7,9	.40	10,2	4334	4334B	4334F	WCLP 375	.35	8,9	.75	19,1	.94	23,8	.031	0,8	.059	1,5
.47	11,9	.55	14,0	4335	4335B	4335F	WCLP 562	.50	12,7	1.24	31,5	1.17	29,8				
.58	14,7	.75	19,1	4336	4336B	4336F	WCLP 750	.50	12,7	1.48	37,6	1.36	34,5				

Standard color natural or black.

*At maximum wire capacity.

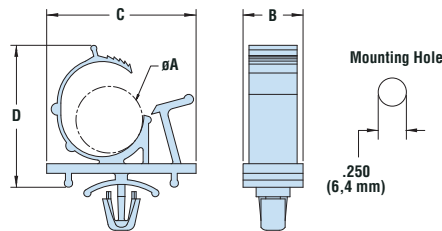

WCLP Series:

- Gather and route wires.
- Adjust to diameter needed to bundle.
- Push mount design allows for fast installation.

HEYClip™ Locking Releasable Wire Clips - Adjustable

Adhesive-Back Mount

MAXIMUM BUNDLE DIAMETER RANGE				PART NO.			DESCRIPTION	PART DIMENSIONS						FIGURE		
A		Rubber Adhesive		Acrylic Adhesive		B		C		D*		E				
Minimum	Maximum	Natural	Black	Natural	Black	Natural	in.	mm.	in.	mm.	in.	mm.	in.	mm.		
.22	5,5	.26	6,5	4323	4323B	4323A	WCLA 258	.65	16,5	.85	21,6	.74	18,8	-	-	1
.31	7,9	.41	10,3	4324	4324B	4329A	WCLA 406	.75	19,1	1.00	25,4	.90	22,8	.35	9,0	2
.47	11,9	.56	14,3	4325	4325B	4325A	WCLA 562	.75	19,1	1.24	31,5	1.12	28,5	.39	10,0	
.58	14,7	.75	19,1	4326	4326B	4326A	WCLA 750	.75	19,1	1.50	38,1	1.32	33,6	.47	12,0	
.87	22,2	1.00	25,4	4327	4327B	4327A	WCLA 1000	1.00	25,4	1.99	50,5	1.78	45,3	.63	16,0	

Standard color natural or black.

*At maximum wire capacity.

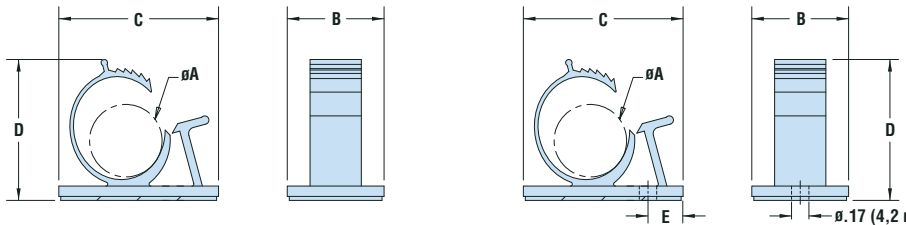


Figure 1

Figure 2

WCLA Series:

- Lock securely and easily. Re-open for routing changes.
- Ratcheting clip holds bundle securely in place.
- Good for high vibration applications. Once closed the clip will not open until tab is released.

	WCLP	WCLA / WCLP	Adhesive Temperature Ranges***
Material	Nylon 6/6	Nylon 6/6	Rubber Adhesive 50°F (10°C) to 155°F (68°C)
Flammability Rating	94V-0	94V-2	Acrylic Adhesive 10°F (-12°C) to 180°F (82°C)
Temperature Range	-40°F (-40°C) to 185°F (85°C)	-40°F (-40°C) to 185°F (85°C)	***Low temperature reflects minimum application temperature for adhesives