


“Stay Connected” with



HEYware Products


a PennEngineering® Company

Heyco® Nylon PCB Supports - Metric Spacing




TEARDROP SNAP LOCK /
TEARDROP SNAP LOCK

HSP-MDL-1




TEARDROP SNAP LOCK /
TEARDROP SNAP LOCK

HSP-MDL-2

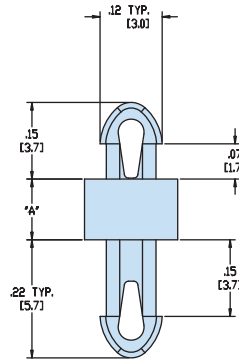

TEARDROP SNAP LOCK /
TEARDROP SNAP LOCK

HSP-MDLS-1

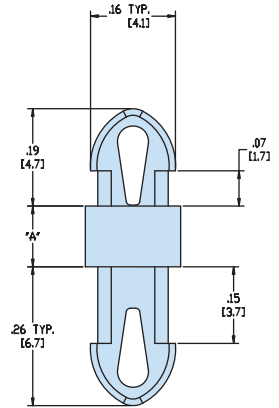

TEARDROP SNAP LOCK /
TEARDROP SNAP LOCK

HSP-MDLS-2

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.098	2,5	.062	1,6	.137	3,5	.062	1,6	.098	2,5	.062	1,6	.137	3,5
Chassis	.062	1,6	.098	2,5	.062	1,6	.137	3,5	.141	3,6	.098	2,5	.141	3,6	.137	3,5

A mm.	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
2,0	10444	HSP-MDL-1-02M	10461	HSP-MDL-2-02M	10478	HSP-MDLS-1-02M	10493	HSP-MDLS-2-02M
3,0	10445	HSP-MDL-1-03M	10462	HSP-MDL-2-03M	10479	HSP-MDLS-1-03M	10494	HSP-MDLS-2-03M
4,0	10446	HSP-MDL-1-04M	10463	HSP-MDL-2-04M	10480	HSP-MDLS-1-04M	10495	HSP-MDLS-2-04M
5,0	10447	HSP-MDL-1-05M	10464	HSP-MDL-2-05M	10481	HSP-MDLS-1-05M	10496	HSP-MDLS-2-05M
6,0	10448	HSP-MDL-1-06M	10465	HSP-MDL-2-06M	10482	HSP-MDLS-1-06M	10497	HSP-MDLS-2-06M
7,0	10449	HSP-MDL-1-07M	10466	HSP-MDL-2-07M	10483	HSP-MDLS-1-07M	10498	HSP-MDLS-2-07M
8,0	10450	HSP-MDL-1-08M	10467	HSP-MDL-2-08M	10484	HSP-MDLS-1-08M	10499	HSP-MDLS-2-08M
9,0	10451	HSP-MDL-1-09M	10468	HSP-MDL-2-09M				
10,0	10452	HSP-MDL-1-10M	10469	HSP-MDL-2-10M	10485	HSP-MDLS-1-10M	10500	HSP-MDLS-2-10M
12,0	10453	HSP-MDL-1-12M	10470	HSP-MDL-2-12M	10486	HSP-MDLS-1-12M	10501	HSP-MDLS-2-12M
14,0	10454	HSP-MDL-1-14M	10471	HSP-MDL-2-14M	10487	HSP-MDLS-1-14M	10502	HSP-MDLS-2-14M
16,0	10455	HSP-MDL-1-16M	10472	HSP-MDL-2-16M	10488	HSP-MDLS-1-16M	10503	HSP-MDLS-2-16M
18,0	10456	HSP-MDL-1-18M	10473	HSP-MDL-2-18M	10489	HSP-MDLS-1-18M	10504	HSP-MDLS-2-18M
20,0	10457	HSP-MDL-1-20M	10474	HSP-MDL-2-20M	10490	HSP-MDLS-1-20M	10505	HSP-MDLS-2-20M
22,0	10458	HSP-MDL-1-22M	10475	HSP-MDL-2-22M	10491	HSP-MDLS-1-22M	10506	HSP-MDLS-2-22M
26,5	10459	HSP-MDL-1-26.5M	10476	HSP-MDL-2-26.5M				

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

Quick
Specs

Material Nylon 6/6
Flammability Rating 94V-2
Temperature Range -40°F (-40°C) to 185°F (85°C)