


Heyco® Nylon PCB Supports - Rivet Mount

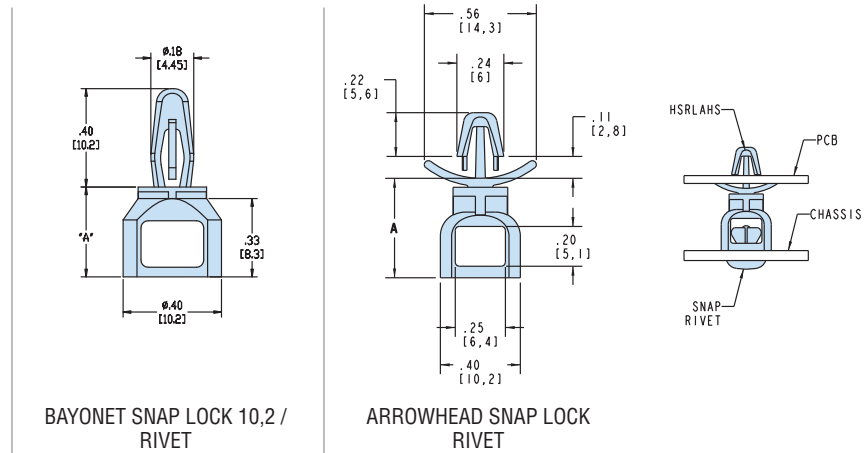

HRLSP **HSRLAHS**

	Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.187	4,8
Chassis	see table		.165	4,2	see table		.161	4,0

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.				
.375	9,5	10603	HRLSP-06		
.437	11,1	10604	HRLSP-07	10878	HSRLAHS-07
.500	12,7	10605	HRLSP-08	10879	HSRLAHS-08
.625	15,9	10606	HRLSP-10	10880	HSRLAHS-10
.750	19,1	10607	HRLSP-12	10881	HSRLAHS-12
.875	22,2	10608	HRLSP-14	10882	HSRLAHS-14
1.000	25,4	10609	HRLSP-16	10883	HSRLAHS-16

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

- Rivet applied from Chassis side.

Rivet Table		
PART NO.	CHASSIS THICKNESS	
	in.	mm.
9058	.03 - .06	0,7 - 1,6
9060	.06 - .11	1,6 - 2,7
9062	.11 - .15	2,7 - 3,7
9064	.15 - .18	3,7 - 4,7
9066	.18 - .22	4,7 - 5,7
9068	.22 - .26	5,7 - 6,7
9318	.28 - .34	7,2 - 8,7

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 185°F (85°C)