


"Stay Connected" with



HEYware Products

a PennEngineering® Company

# Heyco® Nylon Male/Female Threaded Hex Supports

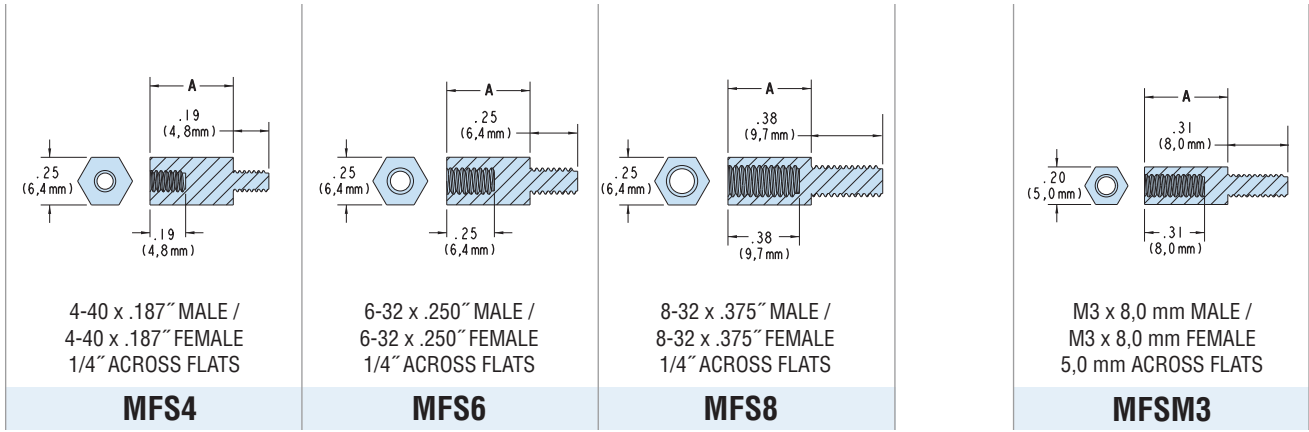

	Thread Length		Mounting Hole Diameter		Thread Length		Mounting Hole Diameter		Thread Length		Mounting Hole Diameter		Thread Length		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	mm.	in.	mm.	mm.
<b>Male end</b>	.187	4,8	4-40		.250	6,4	6-32		.375	9,5	8-32		8,0	.315		M3
<b>Female end</b>	.187	4,8	4-40		.250	6,4	6-32		.375	9,5	8-32		8,0	.315		M3

A	PART NO.		DESCRIPTION	PART NO.		DESCRIPTION	PART NO.		DESCRIPTION	A		PART NO.	DESCRIPTION
	in.	mm.		Natural	Natural		Natural	Natural		mm.	in.		
.250	6,4	<b>11800</b>	MFS4-04	<b>11820</b>	MFS6-04 †	<b>11840</b>	MFS8-04 †	10,0	.394	<b>11860</b>	MFSM3-M10		
.276	7,0	<b>11801</b>	MFS4-04.4					12,0	.472	<b>11861</b>	MFSM3-M12		
.312	7,9	<b>11802</b>	MFS4-05*	<b>11822</b>	MFS6-05*			15,0	.590	<b>11862</b>	MFSM3-M15		
.375	9,5	<b>11803</b>	MFS4-06	<b>11823</b>	MFS6-06	<b>11843</b>	MFS8-06 ††	18,0	.709	<b>11863</b>	MFSM3-M18		
.437	11,1	<b>11804</b>	MFS4-07	<b>11824</b>	MFS6-07	<b>11844</b>	MFS8-07	20,0	.787	<b>11864</b>	MFSM3-M20		
.500	12,7	<b>11805</b>	MFS4-08	<b>11825</b>	MFS6-08	<b>11845</b>	MFS8-08	25,0	.984	<b>11865</b>	MFSM3-M25		
.562	14,3	<b>11806</b>	MFS4-09	<b>11826</b>	MFS6-09	<b>11846</b>	MFS8-09						
.600	15,2	<b>11807</b>	MFS4-09.6										
.625	15,9	<b>11808</b>	MFS4-10	<b>11828</b>	MFS6-10	<b>11848</b>	MFS8-10						
.687	17,4			<b>11829</b>	MFS6-11*								
.750	19,1	<b>11810</b>	MFS4-12	<b>11830</b>	MFS6-12	<b>11850</b>	MFS8-12						
.875	22,2	<b>11811</b>	MFS4-14	<b>11831</b>	MFS6-14	<b>11851</b>	MFS8-14						
.937	23,8			<b>11832</b>	MFS6-15								
1.000	25,4	<b>11813</b>	MFS4-16	<b>11833</b>	MFS6-16	<b>11853</b>	MFS8-16						
1.125	28,6	<b>11814</b>	MFS4-18	<b>11834</b>	MFS6-18	<b>11854</b>	MFS8-18						
1.250	31,8	<b>11815</b>	MFS4-20	<b>11835</b>	MFS6-20	<b>11855</b>	MFS8-20						
1.312	33,3			<b>11836</b>	MFS6-21								
1.375	34,9	<b>11817</b>	MFS4-22	<b>11837</b>	MFS6-22	<b>11857</b>	MFS8-22						
2.000	50,8	<b>11818</b>	MFS4-32	<b>11838</b>	MFS6-32	<b>11858</b>	MFS8-32						

Standard color natural.  
 † Female thread depth is .190" (4,8 mm)  
 †† Female thread depth is .200" (5,1 mm)  
 \* Special order.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 185°F (85°C)