




HEYClip™ Wave Locks

Wave Locks - Adhesive Back Mount

MAXIMUM BUNDLE DIAMETER		PART NO. Natural	DESCRIPTION	PACKAGING		OVERALL HEIGHT C	
in.	mm.			Std. Pack	Small Pack †	in.	mm.
WL-A Series*							
.30 - .40	7,6 - 10,2	12096	WL 350A	5000	25	1.10	27,9
.40 - .50	10,2 - 12,7	12097	WL 450A	5000	25	1.26	32,0
.70 - .80	17,8 - 20,3	12098	WL 750A	5000	25	1.61	40,9

Standard color natural.

† To order Small Packs, please add the suffix -P to Part No.; e.g., 12096-P.

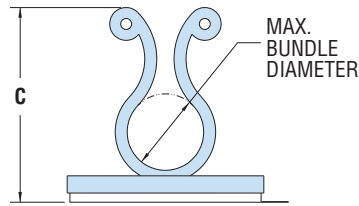

Wave Locks-Adhesive


- Part Description Key: WL XXXA, where XXX = Average Bundle Diameter (inches).
- Parts utilize a polyethylene foam with acrylic adhesive for mounting.



Wave Lock - Screw Mount

MAXIMUM BUNDLE DIAMETER		PART NO. Natural	DESCRIPTION	SCREW MOUNT FOOTPRINT A x B		OVERALL HEIGHT ABOVE PANEL C		MOUNTING HOLE DIAMETER	
in.	mm.			in.	mm.	in.	mm.	in.	mm.
.85	21,6	12100	WLSM 750	.75 X .67	19,0 X 17,0	1.75	44,5	.20	5,0

Standard color natural.

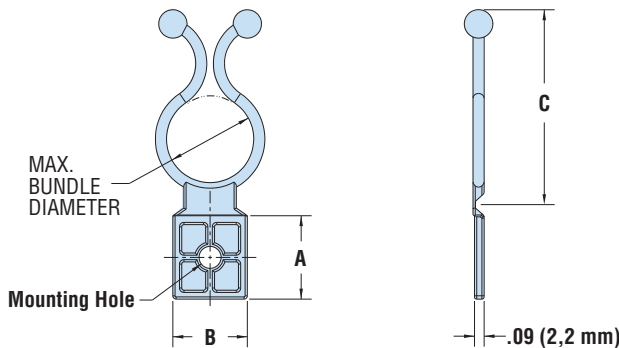

Wave Lock-Screw Mount

- Barrel ends for greater holding power.
- Smooth rounded edges won't cut into cable's insulations—or installer's hands.
- Locking ends twist into place with fingertip pressure.
- Integrated screw mounting tab.

Material	Nylon 6/6	WL-A Adhesive	Acrylic
Flammability Rating	94V-2		
Temperature Range	32°F (0°C) to 185°F (85°C)	*Adhesive Temperature Range: 50°F (10°C) to 95°F (35°C)	

Quick Specs