

“Stay Connected” with



Solar Power Components


a PennEngineering® Company

## Heyco® Nytye® Nylon Cable Tie Variations


PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS							
Tensile Strength	Max. Bundle Diameter	Natural	UV Black	A	B		A	B						
Lbs.	N	in.	mm.					in.	mm.					
<b>Low Profile</b>														
<b>ALL NEW PRODUCT</b>														
18	80	.98	25,0	14110	14110B	LPNT-18-043	4.33	110						
		1.57	40,0	14111	14111B	LPNT-18-061	6.10	155	.10	2,5				
		2.00	51,0	14112	14112B	LPNT-18-080	8.07	205						
40	178	1.29	33,0	14113	14113B	LPNT-40-059	5.90	150						
		2.00	51,0	14114	14114B	LPNT-40-080	8.07	205	.14	3,6				
		3.03	77,0	14115	14115B	LPNT-40-110	11.02	280						
		4.05	103,0	14116	14116B	LPNT-40-145	14.56	370						
50	222	2.04	52,0	14117	14117B	LPNT-50-080	8.04	205						
		2.67	68,0	14118	14118B	LPNT-50-100	10.04	255	.18	4,6				
		2.99	76,0	14119	14119B	LPNT-50-110	11.02	280						
		4.05	103,0	14120	14120B	LPNT-50-145	14.56	370						
120	534	3.03	77,0	14121	14121B	LPNT-120-110	11.02	280						
		4.05	103,0	14122	14122B	LPNT-120-145	14.56	370	.30	7,6				
<b>Releasable</b>														
<b>ALL NEW PRODUCT</b>														
40	178	1.38	35,0	<b>13297</b>	<b>13297B</b>	RNT-40-059	5.94	151	.14	3,5				
		1.97	50,0	<b>13301</b>	<b>13301B</b>	RNT-50-079	7.95	202	.18	4,5				
		3.00	76,0	<b>14000</b>	<b>14000B</b>	RNT-50-110	11.02	280	.19	4,8				
50	222	1.18	30,0	<b>14005</b>	<b>14005B</b>	RNT-50-049	4.92	125	.28	7,2				
		1.38	35,0	<b>14010</b>	<b>14010B</b>	RNT-50-059	5.90	150						
		1.97	50,0	<b>14011</b>	<b>14011B</b>	RNT-50-079	7.87	200						
		2.60	66,0	<b>14012</b>	<b>14012B</b>	RNT-50-098	9.84	250	.30	7,6				
		3.27	83,0	<b>14013</b>	<b>14013B</b>	RNT-50-118	11.81	300						
		3.54	90,0	<b>14014</b>	<b>14014B</b>	RNT-50-137	13.78	350						
<b>Screw Mount</b>														
18	80	.87	22,0	<b>13307</b>	-	MNT-18-044	4.41	112	.10	2,5	#4 screw			
40	178	1.38	35,0	<b>13308</b>	-	MNT-40-067	6.69	170	.14	3,6	#8 screw			
50	222	1.75	44,4	<b>3560*</b>	-	MNT-150	8.00	203	.19	4,8	#10 screw			
		1.97	50,0	<b>13309</b>	-	MNT-50-086	8.66	220	.17	4,3				
<b>Identification</b>														
<b>Marking Area W x L</b>														
18	80	.87	22,0	<b>13316</b>	-	NTID-18-039	3.94	100	.10	2,5	.31	8,0	1.00	25,4
				<b>13317</b>	-	NTID-18-039-1	3.94	100	.10	2,5	.83	21,0	1.10	28,0

Standard color natural and UV Black. Consult Heyco for heat-stabilized material and colors.


\*cURus

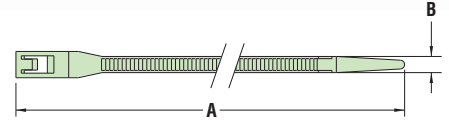


Low Profile



Releasable

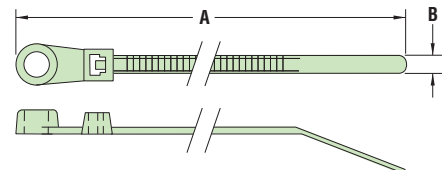

Screw Mount

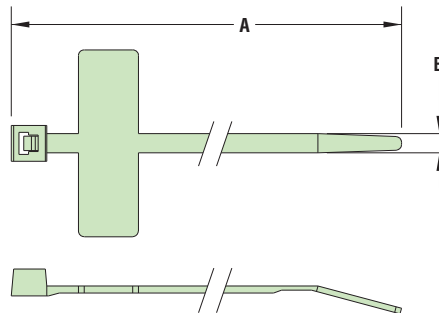

Identification



Material	Nylon 6/6
Certifications	cUL US Certified by Underwriters' Laboratories for compliance with both Canadian and US Requirements under File E54523 (Releasable and Screw Mount Nytyes only)
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185° F (85° C)

Quick Specs