

“Stay Connected” with



Solar Power Components

a PennEngineering® Company




HEYClip™ RevRunner® Cable Clips for 1-2 Cables

Double-Compression, Straight-thru Design

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE	PART NO.		DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum		Maximum			304	316		A x B		C	
in.	mm.	in.	mm.		Stainless	Stainless			in.	mm.	
RevRunner Clip - for panels up to .120" (3,0 mm) thick											
.06	1,4	.13	3,2	.20" (5,1 mm)- .33" (8,3 mm) each cable	S6507	-	RevRunner Clip 100 Pack	1.00 x	25,4 x	.39	9,9
					S6547	-	RevRunner Clip Bulk	.50	12,7		

- Design is similar to the original SunRunner, but oriented so that cables are hidden inside the PV module frame for an aesthetically pleasing installation.
- Can hold 1 or 2 cables from .20" (5,1 mm) to .33" (8,3 mm).
- Installs on PV module frames or other areas with materials that are from .06" (1,4 mm) to .13" (3,2 mm) thick.

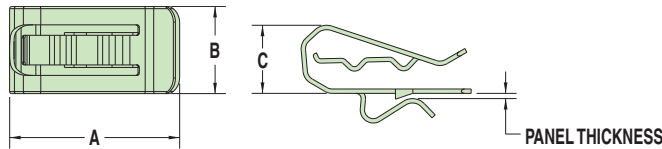

Material

Certifications

Temperature Range

.025" thick 304 stainless steel



Certified by UL for Compliance with both Canadian and US Requirements under File E54523

-40°F (-40°C) to 572°F (300°C)

*Quick
Specs*