Heyco® V-0 Liquid Tight Hole Plugs
Standard 85 Durometer Plugs

Maximum Panel Thickness .125″ (3,2 mm)
Mounting Hole Diameter Range: .500″ (12,7 mm) to 1.375″ (34,9 mm)



MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	UL or CSA	PART DIMENSIONS A Head Diameter		B Overall Height		C Head Thickness	
in.	mm.	Black			in.	mm.	in.	mm.	in.	mm.
.500	12,7	**3830**	KOS LT 500	CSA	.91	23,1	.45	11,4	.29	7,4
.625	15,9	**3834**	KOS LT 625	CSA	1.03	26,2	.47	11,9	.31	7,9
.750	19,1	**3831**	KOS LT 750	CSA	1.15	29,2	.51	13,0	.35	8,9
.875	22,2	**3833**	KOS LT 1/2	UL	1.23	32,5	.50	13,5	.36	9,1
1.000	25,4	**3832**	KOS LT 1000	CSA	1.41	35,8	.56	14,2	.40	10,2
1.093	27,8	**3835**	KOS LT 3/4	UL	1.53	38,6	.55	14,0		
1.375	34,9	**3837**	KOS LT 1	UL	1.78	45,2	.57	14,5	.42	10,7

Available in black only.


- **Oil tight, rain tight, and submersible with an IPX6 rating**.
- UL certified for outdoor applications.
- V0 Flammability rating.
- Install with fingertip pressure (no tool required).
- Multiple nominal sizes fit .500″ (12,7 mm) to 1.000″ (25,4 mm) true size mounting holes.
- Three trade sizes fit 1/2″ to 1″ knock-out holes.
- Lock firmly in boxes from .030″ (0,8 mm) to .125″ (3,2 mm) thick.
- True sizes are UL recognized under Underwriters' Laboratories File E51579 and CSA certified by Canadian Standard Association File 8919.
- Trade sizes are UL listed under Underwriters' Laboratories File E51579 and CSA certified by Canadian Standard Association File 081067C. **Now certified for NEMA 4 and 4X applications**.

Low 75 Durometer Plugs

Maximum Panel Thickness .125″ (3,2 mm)
Mounting Hole Diameter Range: .875″ (22,2 mm) to 1.375″ (34,9 mm)

MOUNTING HOLE DIAMETER*		PART NO.		DESCRIPTION	UL or CSA	PART DIMENSIONS* A Head Diameter		B Overall Height		C Head Thickness	
in.	mm.	Black	Gray			in.	mm.	in.	mm.	in.	mm.
.875	22,2	**3833FN**	**3833FP**	KOS LT 1/2 LD	UL	1.23	32,5	.53	13,5	.36	9,1
1.093	27,8	**3835FN**	**3835FP**	KOS LT 3/4 LD	UL	1.53	38,6	.55	14,0	.40	10,2
1.375	34,9	**3837FN**	**3837FP**	KOS LT 1 LD	UL	1.80	45,2	.56	14,3	.42	10,7

Standard colors black and gray.
*Consult Heyco for other Liquid Tight Hole Plug sizes in Low Durometer material.

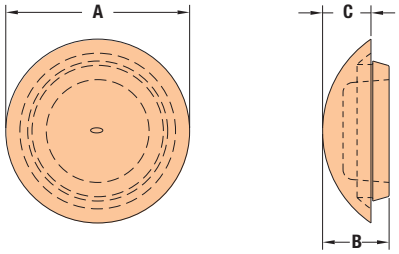

Material	85 Durometer		TPE-Hardness 85 Shore A
	75 Durometer		TPE-Hardness 75 Shore A
Certifications	Trade Sizes (1/2, 3/4, 1)	UL	Listed under Underwriters' Laboratories File E51579
		CSA	Certified by Canadian Standard Association File 081067C
	True Sizes	CSA	Recognized under Underwriters' Laboratories File E51579
	(all others)	CSA	Certified by Canadian Standard Association File 8919
Flammability Rating			94V-0
Temperature Range			-81°F (-60°C) to 275°F (135°C)

Quick Specs