




## Heyco-Flex™ VI Liquid Tight Conduit

Flexible, PVC/Metal Liquid Tight Electrical Conduit (LFMC)

- Constructed of PVC jacketed, continuously interlocked hot dipped zinc galvanized steel core for exceptional crush and corrosion resistance.
- Used with standard liquid-tight fittings (page 2-16) for easy installation.
- IP 67 Rated when installed with approved connectors.
- Durable, sunlight resistant and flame retardant thermoplastic PVC jacket that resists heat, oil, and chemical breakdown.
- Approved for both exposed and concealed locations, direct burial and in concrete.
- Approved as an equipment grounding conductor if the total grounding path is 6 ft. or less and the circuit conductors are protected by over 20 amps for 3/8" and 1/2" and 60 amps or less for 3/4" through 1-1/4".
- Suitable for use in hazardous locations per NEC Articles 501 Class I Div. 2, Article 502 Class II Div. 1 & 2, Article 503 Class III Div. 1 & 2.
- Complies with UL Standard 360 File No. E18917; CSA C22.2 File No. 158897; and NEC Article 350.
- DFARS Compliant

TRADE SIZE	PART NO. Gray	DESCRIPTION	PART DIMENSIONS				MINIMUM BEND RADIUS	STANDARD COIL LENGTH
			A Outside Diameter		B Inside Diameter			
			in.	mm.	in.	mm.		
3/8	<b>8457</b>	HF6 3/8 LFMC	.70	17,8	.49	12,5	2.0	100
1/2	<b>8458</b>	HF6 1/2 LFMC	.83	21,1	.63	16,1	3.25	
3/4	<b>8459</b>	HF6 3/4 LFMC	1.04	26,4	.83	21,1	4.25	
1	<b>8460</b>	HF6 1 LFMC	1.30	33,1	1.04	26,4	6.5	

Standard color gray. Consult Heyco for black and other colors.

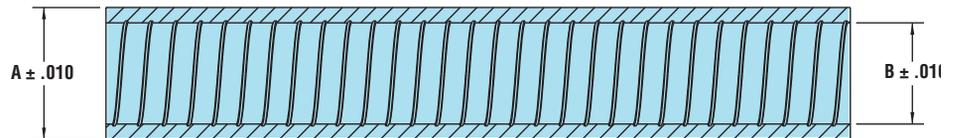

Quick Specs

Material	PVC jacket with zinc galvanized steel core
Certifications	Listed under the Component Program of Underwriters' Laboratories File E469210 Certified by Canadian Standards Association File 260992
Temperature Range	-4°F (-20°C) to 140°F (60°C)