



- For clamping cable or tubing securely into place.
- Resist corrosion, salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- All parts are size marked in inches and millimeters.
- Standard material Nylon 6/6. 94V-0 available, consult Heyco.
- For Snap Rivets compatible with Heyco Cable Clamps, see the table on page 7-37.

Heyco® Nylon Cable Clamps

MOUNTING HOLE DIAMETER	SCREW SIZE	PART DIMENSION A	PART NO. V-2		PART NO. V-0		DESCRIPTION	CENTER-TO-CENTER DIMENSION B	
			Black	Natural	Black	Natural		in.	mm.

Light Duty - 3/8" (9,5 mm) wide, .05" (1,3 mm) thick

.170	4,3	8	.125	3,2	3362	3312	3362F	3312F	CCL 125-170	.36	9,1
			.187	4,7	3363	3313	3363F	3313F	CCL 187-170	.39	9,9
			.250	6,3	3364	3314	3364F	3314F	CCL 250-170	.42	10,7
			.312	7,9	3365	3315	3365F	3315F	CCL 312-170	.46	11,7
			.375	9,5	3366	3316	3366F	3316F	CCL 375-170	.49	12,4
			.437	11,1	3367	3317	3367F	3317F	CCL 437-170	.53	13,5
.203	5,2	10	.500	12,7	3368	3318	3368F	3318F	CCL 500-170	.55	14,0
			.125	3,2	3352	3302	3352F	3302F	CCL 1/8	.34	8,6
			.187	4,7	3353	3303	3353F	3303F	CCL 3/16	.38	9,7
			.250	6,3	3354	3304	3354F	3304F	CCL 1/4	.41	10,4
			.312	7,9	3355	3305	3355F	3305F	CCL 5/16	.44	11,2
			.375	9,5	3356	3306	3356F	3306F	CCL 3/8	.48	12,2
			.437	11,1	3357	3307	3357F	3307F	CCL 7/16	.51	13,0
			.500	12,7	3358	3308	3358F	3308F	CCL 1/2	.53	13,5

Heavy Duty - 1/2" (12,7 mm) wide, .06" (1,5 mm) thick

.203	5,2	10	.125	3,2	3372	3322	3372F	3322F	CCH 1/8	.37	9,4
			.187	4,8	3373	3323	3373F	3323F	CCH 3/16	.41	10,4
			.250	6,3	3374	3324	3374F	3324F	CCH 1/4	.44	11,2
			.312	7,9	3375	3325	3375F	3325F	CCH 5/16	.48	12,2
			.375	9,5	3376	3326	3376F	3326F	CCH 3/8	.51	13,0
			.437	11,1	3377	3327	3377F	3327F	CCH 7/16	.54	13,7
			.500	12,7	3378	3328	3378F	3328F	CCH 1/2	.58	14,7
			.562	14,3	3379	3329	3379F	3329F	CCH 9/16	.61	15,5
			.625	15,9	3380	3330	3380F	3330F	CCH 5/8	.65	16,5
			.687	17,4	3381	3331	3381F	3331F	CCH 11/16	.68	17,3
			.750	19,1	3382	3332	3382F	3332F	CCH 3/4	.71	18,0
			.812	20,6	3383	3333	3383F	3333F	CCH 13/16	.75	19,1
			.875	22,2	3384	3334	3384F	3334F	CCH 7/8	.78	19,8
			1.000	25,4	3390	3340	3390F	3340F	CCH 1	.85	21,6
			1.130	28,6	3392	3342	-	-	CCH 1-1/8	.92	23,4
			1.190	30,1	3393	3343	-	-	CCH 1-3/16	.95	24,1
			1.250	31,8	3394	3344	-	-	CCH 1-1/4	.99	25,1
			1.375	34,9	3396	3346	-	-	CCH 1-3/8	1.05	26,7
			1.500	38,1	3398	3348	-	-	CCH 1-1/2	1.12	28,4

Adjustable - 1/2" (12,7 mm) wide, .065" (1,7 mm) thick



NEW!	.203	5,2	10	1.75 - 2.00	44,5 50,8	-	3755	-	-	ACC 1750-2000	-	-
-------------	------	-----	----	----------------	--------------	---	------	---	---	---------------	---	---

Standard colors black and natural.



Molded in open position for easy assembly.

Full radius on all inside edges

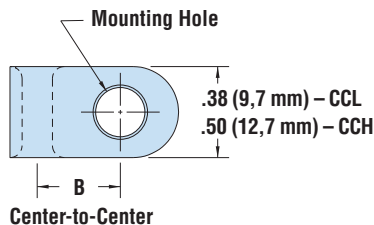

Quick
Specs

Material	Nylon 6/6	Flammability Rating	Temperature Range
	Black	UL 94V-2	32°F (0°C) to 221°F (105°C)
	Natural	UL 94V-2	32°F (0°C) to 185°F (85°C)
	Black	UL 94V-0	32°F (0°C) to 212°F (100°C)
	Natural	UL 94V-0	32°F (0°C) to 266°F (130°C)