

"Stay Connected" with

HEYCO®

Solar Power Components

a PennEngineering® Company




Heyco® Crimpless SunBundler®

Crimpless PVC Coated Stainless Steel Wire Cable Ties

- Fast and easy installation
- No crimping required
- Crimpless design minimizes repetitive strain on the installer.
- Releasable and reusable for easy repositioning during install.
- Releasable and reusable for cable repair and replacement for long-term economic viability.
- Cube manufactured from F1-rated Nylon 6/6. UV and heat stable for outdoor use and harsh environments.
- UV protected vinyl jacket ideal for solar installation where product durability is required.
- Smooth vinyl jacketing prevents damage to cable insulation.

MAX. TENSILE STRENGTH		MAX. BUNDLE DIAMETER		PART NO. Black		DESCRIPTION	PART DIMENSION (A) Length	
Lbs.	N	in.	mm.	100 Pack	Bulk		Tol. ±.125 / ±3,2 mm	in. mm.
50	222	.95	24,1	S6804	S6805	Crimpless SunBundler® 4	4	102
		1.55	39,4	S6806	S6807	Crimpless SunBundler® 6	6	152
		2.30	58,4	S6808	S6809	Crimpless SunBundler® 8	8	203
		2.95	74,2	S6810	S6811	Crimpless SunBundler® 10	10	254
		3.88	98,6	S6812	S6813	Crimpless SunBundler® 12	12	305
		4.20	106,7	S6814	S6815	Crimpless SunBundler® 14	14	356
		6.36	161,5	S6820	S6821	Crimpless SunBundler® 20	20	508
		7.32	185,9	S6824	S6825	Crimpless SunBundler® 24	24	610
		8.59	218,2	S6828	S6829	Crimpless SunBundler® 28	28	711
		9.87	250,7	S6832	S6833	Crimpless SunBundler® 32	32	813
		11.13	282,7	S6836	S6837	Crimpless SunBundler® 36	36	914
		12.41	315,2	S6840	S6841	Crimpless SunBundler® 40	40	1016
		13.63	346,2	S6844	S6845	Crimpless SunBundler® 44	44	1118
				S6390		Crimpless SunBundler Release Plier		

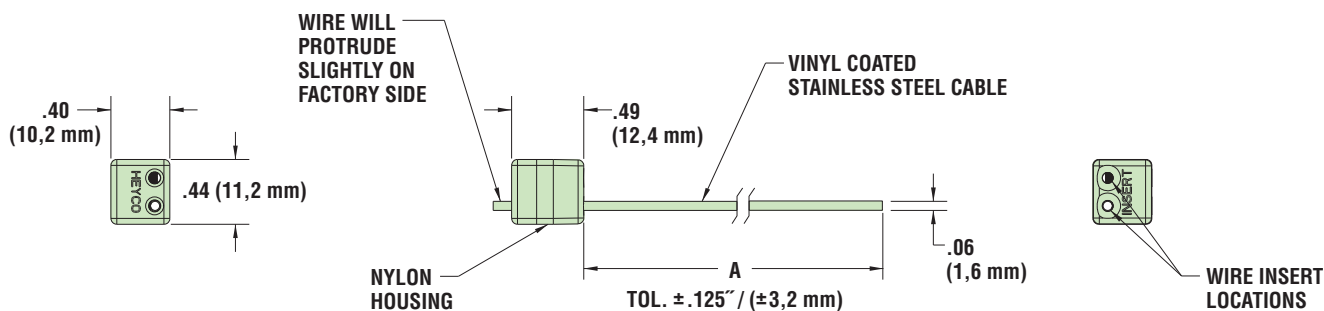

Quick Specs

	Cable	Cube
Material	Commercial Aircraft Grade 302/304 stainless wire w/UV protected vinyl jacket	UV / Heat Stable Nylon 6/6
Certifications	ETL Certified to UL 62275 and UL 1565 and Type 2S	
Temperature Range	-40°F (-40°C) to 221°F (105°C)	