

*"Stay Connected" with*

**HEYCO®**

Solar Power Components



a PennEngineering® Company



## HEYClip™ SunRunner® Nylon Cable Clips for 1-2 Cables

Double-Compression, Straight-thru Design

PANEL THICKNESS CLAMPING RANGE				MINIMUM PANEL FLANGE DEPTH		MINIMUM OVAL HOLE DEPTH		WIRE DIAMETER RANGE		PART NO.		DESCRIPTION	FOOTPRINT A x B		OVERALL HEIGHT C	
Minimum	Maximum									HS/UV Nylon	Nylon 12		in.	mm.	in.	mm.
in.	mm.	in.	mm.	in.	mm.	in.	mm.									
0.05	1,3	0.12	3,1	0.72	18,3	0.28	7,1	.20" (5,0 mm) - .315" (8,0 mm) each cable		S6551	S6553	SunRunner® Nylon 100 Pack	0.91 x 0.50	23,1 x 12,7	0.39	9,9
										S6552	S6554	SunRunner® Nylon Bulk				

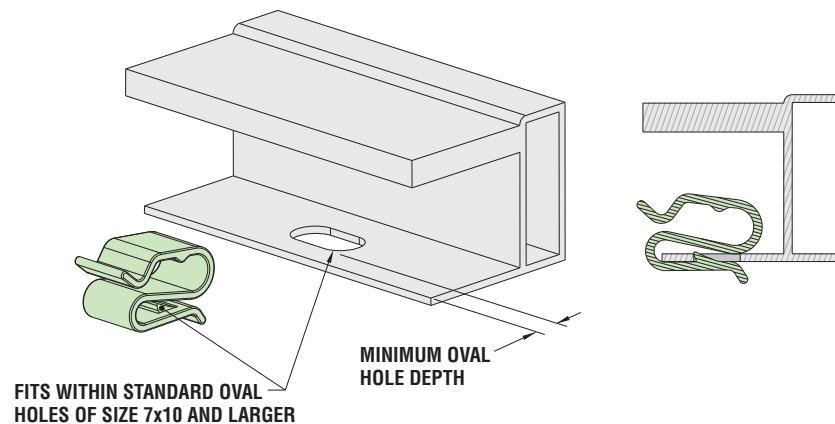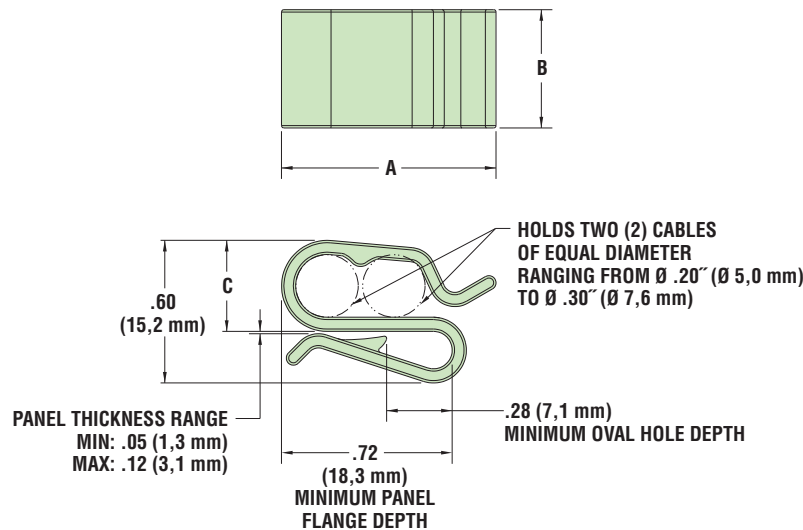

- Low cost option to popular SunRunner Wire Management Clip.
- Route 2 PV wires in one clip.
- Slide on to the edge of a PV Solar panel.
- Lock in place in any 7x10 or larger oval wire management mounting hole.
- Made of rugged Nylon 6/6, F1-rated for outdoor use.
- For added security, also available in super-tough Nylon 12 material.

Material  
Temperature Range

Heat Stable, UV Rated Nylon 6/6 or Nylon 12  
Nylon 6/6: -40°F (-40°C) to 221°F (105°C)  
Nylon 12: -40°F (-40°C) to 248°F (120°C)

*Quick  
Specs*