

*“Stay Connected” with*

**HEYCO®**

Solar Power Components


*a PennEngineering® Company*



- All-in-one solution to protecting the exposed end of any unsecured 4 mm PV connector.
- Simple push-in with quarter-turn feature keeps connector cap in place.
- Plugs in to male or female end of unsecured 4 mm PV connector.
- Protects unused and exposed 4 mm PV connectors from liquids, insects and dust particulate until ready for final installation.
- Meets a minimum of IPX4 on all 4 mm PV connectors on the market.
- Meets IP68 for the most popular 4 mm PV connector on the market, the Staubli MC4.

## Heyco® Liquid Tight PV Connector Cap

PART NO.	DESCRIPTION	PART DIMENSIONS					
		A in.	A mm.	B in.	B mm.	C in.	C mm.
<b>S6254</b>	LTPVCC YELLOW 100/BAG	0.85	21,6	0.80	20,3	1.43	36,3
<b>S6255</b>	LTPVCC YELLOW BULK						

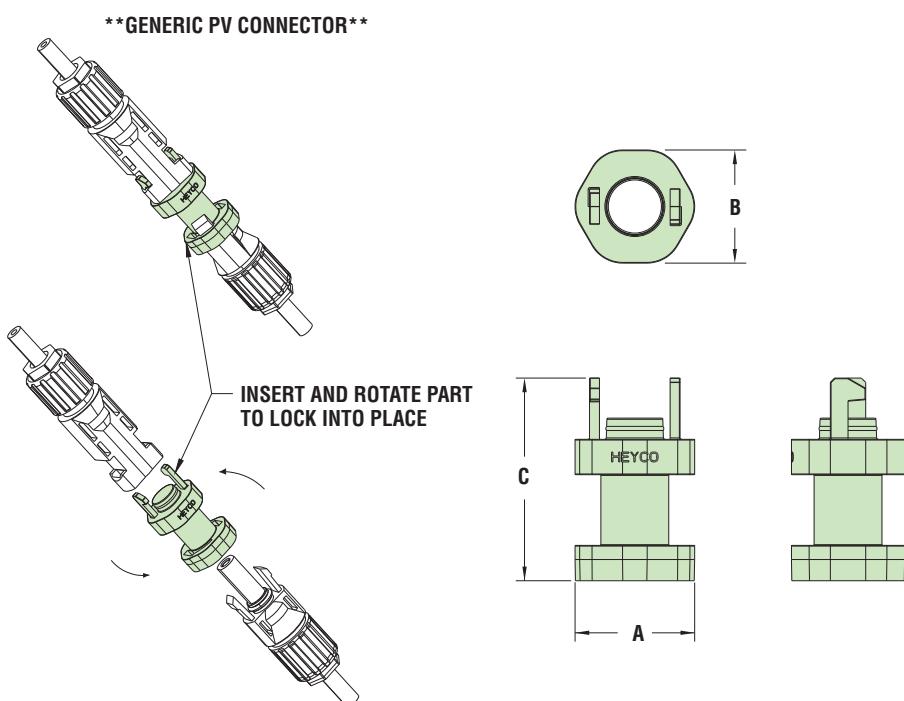

*Quick  
Specs*

Material  
Temperature Range

Heat Stable, UV Rated Nylon 6/6 – Color: Yellow  
-40°F (-40°C) to 221°F (105°C)