

"Stay Connected" with



HEYware Products




a PennEngineering® Company



Heyco® Wire Ducting

2 Meter Pieces

- Cover Included!!!
- Ducting organizes and protects large bundles of cable.
- Shields cables from impact and prevents tangled mess.
- Removable cover makes for easy access for maintenance and expansion.
- Wide and thin slotted options for cabling breakout as needed in your configuration.
- Excellent for use in data centers and high density cabling areas.
- Slotted fingers break off cleanly for larger cable breakouts where needed.

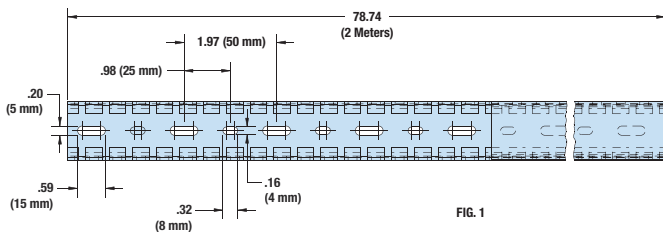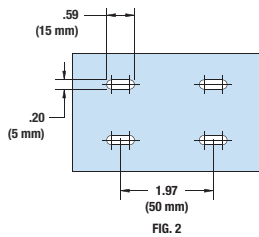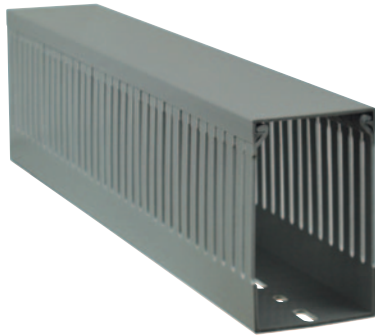


NOMINAL		PART NO.		DESCRIPTION	PART DIMENSIONS								FIGURE
W	H	Gray	White		ACTUAL								
Width	Height				W	H	D		E				
in.	in.				Width	Height	in.	mm.	in.	mm.	in.	mm.	

WD-Series

1.0	1.5	13600	13600WH	WD1X1.5	.984	25,0	1.575	140,0	.24	6,0	.31	8,0	1				
	2.0	13602	13602WH	WD1X2			1.969	50,0									
	3.0	13603	13603WH	WD1X3			3.150	80,0						.31	8,0	.39	10,0
1.5	1.5	13610	13610WH	WD1.5X1.5	1.575	40,0	1.575	40,0	.24	6,0	.31	8,0					
	2.0	13612	13612WH	WD1.5X2			1.969	50,0									
	3.0	13613	13613WH	WD1.5X3			3.150	80,0						.31	8,0	.39	10,0
2.0	2.0	13622	13622WH	WD2X2	1.969	50,0	1.969	50,0	.24	6,0	.31	8,0					
	3.0	13623	13623WH	WD2X3			3.150	80,0						.31	8,0	.39	10,0
	4.0	13624	13624WH	WD2X4			3.937	100,0						.39	10,0	.47	12,0
3.0	2.0	13632	13632WH	WD3X2	3.150	80,0	1.969	50,0	.24	6,0	.31	8,0					
	3.0	13633	13633WH	WD3X3			3.150	80,0					.31	8,0	.39	10,0	
	4.0	13634	13634WH	WD3X4			3.937	100,0					.39	10,0	.47	12,0	
4.0	2.0	13642	13642WH	WD4X2	3.937	100,0	1.969	50,0	.24	6,0	.31	8,0					
	3.0	13643	13643WH	WD4X3			3.150	80,0					.31	8,0	.39	10,0	
	4.0	13644	13644WH	WD4X4			3.937	100,0					.39	10,0	.47	12,0	

WDT-Series

1.0	1.5	13700	13700WH	WDT1X1.5	.984	25,0	1.575	40,0	.16	4,0	.24	6,0	1
	2.0	13702	13702WH	WDT1X2			1.969	50,0					
	3.0	13703	13703WH	WDT1X3			3.150	80,0					
1.5	1.5	13710	13710WH	WDT1.5X1.5	1.575	40,0	1.575	40,0					
	2.0	13712	13712WH	WDT1.5X2			1.969	50,0					
	3.0	13713	13713WH	WDT1.5X3			3.150	80,0					
2.0	2.0	13722	13722WH	WDT2X2	1.969	50,0	1.969	50,0					
	3.0	13723	13723WH	WDT2X3			3.150	80,0					
	4.0	13724	13724WH	WDT2X4			3.937	100,0					
3.0	2.0	13732	13732WH	WDT3X2	3.150	80,0	1.969	50,0	2				
	3.0	13733	13733WH	WDT3X3			3.150	80,0					
	4.0	13734	13734WH	WDT3X4			3.937	100,0					
4.0	2.0	13742	13742WH	WDT4X2	3.937	100,0	1.969	50,0					
	3.0	13743	13743WH	WDT4X3			3.150	80,0					
	4.0	13744	13744WH	WDT4X4			3.937	100,0					

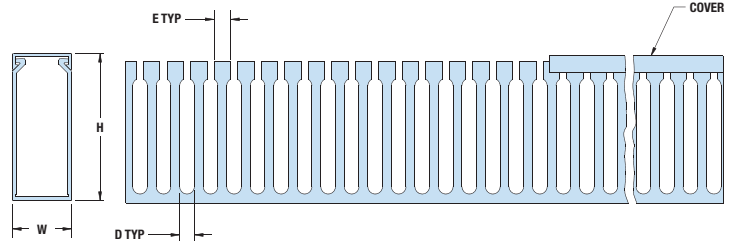

Quick
Specs

Material
Temperature Range

PVC
-40°F (-40°C) to 149°F (65°C)