

"Stay Connected" with



HEYware Products



a PennEngineering® Company



Heyco® Wire Ducting

2 Meter Pieces

- Cover Included!!!
- Ducting organizes and protects large bundles of cable.
- Shields cables from impact and prevents tangled mess.
- Removable cover makes for easy access for maintenance and expansion.
- Wide and thin slotted options for cabling breakout as needed in your configuration.
- Excellent for use in data centers and high density cabling areas.
- Slotted fingers break off cleanly for larger cable breakouts where needed.

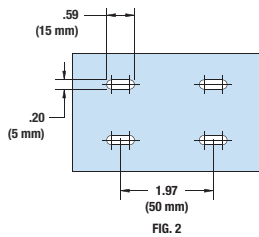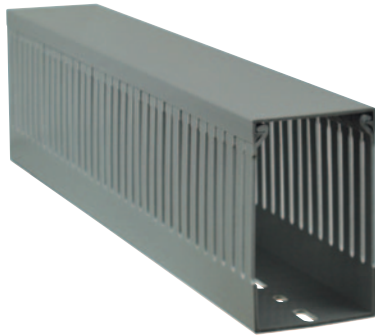



NOMINAL		PART NO.		DESCRIPTION	PART DIMENSIONS								FIGURE
W	H	Gray	White		ACTUAL								
Width	Height				W	H	D		E				
in.	in.				Width	Height	in.	mm.	in.	mm.	in.	mm.	

WD Series - WIDE

1.0	1.5	13600	13600WH	WD1X1.5	.984	25,0	1.575	40,0	.24	6,0	.31	8,0	1
	2.0	13602	13602WH	WD1X2			1.969	50,0					
	3.0	13603	13603WH	WD1X3			3.150	80,0					
1.5	1.5	13610	13610WH	WD1.5X1.5	1.575	40,0	1.575	40,0	.24	6,0	.31	8,0	1
	2.0	13612	13612WH	WD1.5X2			1.969	50,0					
	3.0	13613	13613WH	WD1.5X3			3.150	80,0					
2.0	2.0	13622	13622WH	WD2X2	1.969	50,0	1.969	50,0	.24	6,0	.31	8,0	1
	3.0	13623	13623WH	WD2X3			3.150	80,0					
	4.0	13624	13624WH	WD2X4			3.937	100,0					
3.0	2.0	13632	13632WH	WD3X2	3.150	80,0	1.969	50,0	.24	6,0	.31	8,0	2
	3.0	13633	13633WH	WD3X3			3.150	80,0					
	4.0	13634	13634WH	WD3X4			3.937	100,0					
4.0	2.0	13642	13642WH	WD4X2	3.937	100,0	1.969	50,0	.24	6,0	.31	8,0	2
	3.0	13643	13643WH	WD4X3			3.150	80,0					
	4.0	13644	13644WH	WD4X4			3.937	100,0					

WDT Series - THIN

1.0	1.5	13700	13700WH	WDT1X1.5	.984	25,0	1.575	40,0					1
	2.0	13702	13702WH	WDT1X2			1.969	50,0					
	3.0	13703	13703WH	WDT1X3			3.150	80,0					
1.5	1.5	13710	13710WH	WDT1.5X1.5	1.575	40,0	1.575	40,0					1
	2.0	13712	13712WH	WDT1.5X2			1.969	50,0					
	3.0	13713	13713WH	WDT1.5X3			3.150	80,0					
2.0	2.0	13722	13722WH	WDT2X2	1.969	50,0	1.969	50,0	.16	4,0	.24	6,0	1
	3.0	13723	13723WH	WDT2X3			3.150	80,0					
	4.0	13724	13724WH	WDT2X4			3.937	100,0					
3.0	2.0	13732	13732WH	WDT3X2	3.150	80,0	1.969	50,0					2
	3.0	13733	13733WH	WDT3X3			3.150	80,0					
	4.0	13734	13734WH	WDT3X4			3.937	100,0					
4.0	2.0	13742	13742WH	WDT4X2	3.937	100,0	1.969	50,0					2
	3.0	13743	13743WH	WDT4X3			3.150	80,0					
	4.0	13744	13744WH	WDT4X4			3.937	100,0					

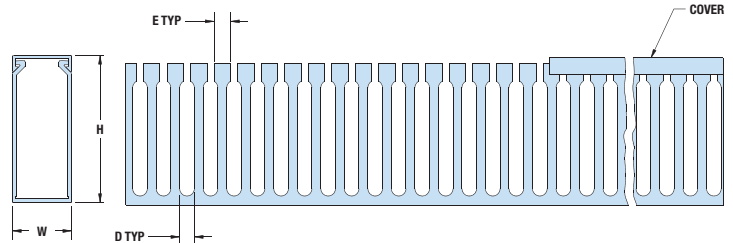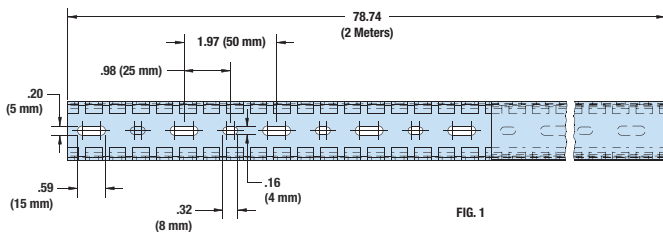

Quick
Specs

Material
Temperature Range

PVC
-40°F (-40°C) to 149°F (65°C)