

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company




Heyco® -Tite Brass Profile™ Liquid Tight Cordgrips

Metric Hubs

The Ultimate in Liquid Tight Strain Relief Protection

- Heyco Profile Liquid Tight Cordgrips inhibit manipulation from outside the panel - there is no contact surface offering opportunity for interference by hand or tool.
- Attractive low profile shape for design-sensitive applications.
- Nickel-plated brass construction for superior protection of flexible cables.
- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- The upper sections of the High Temperature and FDA Approved Cordgrips are fabricated from 303 Stainless Steel.
- DFARS Compliant



CABLE DIAMETER RANGE				PART NO.	THREAD SIZE	PART DIMENSIONS							
Minimum		Maximum				A Clearance Hole Dia.		B Head Height		C Length Below Panel		D Wrenching Flat Size	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.

Standard Gland

.197	5,0	.256	6,5	14800	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.75	19,0
.256	6,5	.315	8,0	14801									
.236	6,0	.315	8,0	14802	M20 x 1,5	1.063	27,0	.18	4,5	.91	23,0	.85	24,0
.315	8,0	.413	10,5	14803									
.315	8,0	.433	11,0	14804	M25 x 1,5	1.260	32,0	.22	5,5	.98	25,0	1.18	30,0
.433	11,0	.591	15,0	14805									
.492	12,5	.630	16,0	14806	M32 x 1,5	1.535	39,0	.24	6,0	1.10	28,0	1.42	36,0
.630	16,0	.806	20,5	14807									


FDA Approved Gland*

.197	5,0	.256	6,5	14810	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.75	19,0
.256	6,5	.315	8,0	14811									
.236	6,0	.315	8,0	14812	M20 x 1,5	1.063	27,0	.18	4,5	.91	23,0	.85	24,0
.315	8,0	.413	10,5	14813									
.315	8,0	.433	11,0	14814	M25 x 1,5	1.260	32,0	.22	5,5	.98	25,0	1.18	30,0
.433	11,0	.591	15,0	14815									
.492	12,5	.630	16,0	14816	M32 x 1,5	1.535	39,0	.24	6,0	1.10	28,0	1.42	36,0
.630	16,0	.806	20,5	14817									

High Temperature Gland*

.197	5,0	.256	6,5	14820	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.75	19,0
.256	6,5	.315	8,0	14821									
.236	6,0	.315	8,0	14822	M20 x 1,5	1.063	27,0	.18	4,5	.91	23,0	.85	24,0
.315	8,0	.413	10,5	14823									
.315	8,0	.433	11,0	14824	M25 x 1,5	1.260	32,0	.22	5,5	.98	25,0	1.18	30,0
.433	11,0	.591	15,0	14825									
.492	12,5	.630	16,0	14826	M32 x 1,5	1.535	39,0	.24	6,0	1.10	28,0	1.42	36,0
.630	16,0	.806	20,5	14827									

*Extra lead time required, consult Heyco

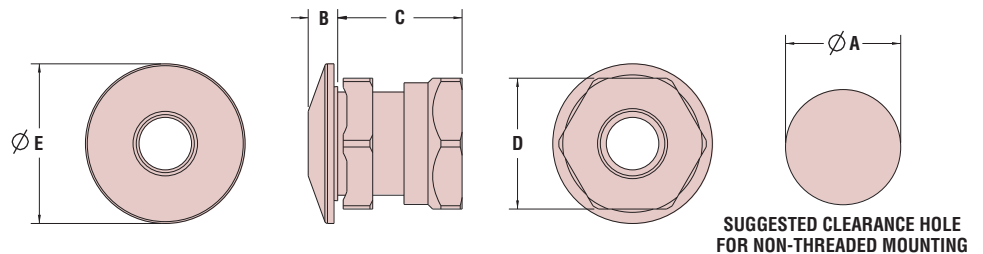

Quick
Specs

Material: Nickel-Plated Brass w/TPE Sealing Gland and FPM Sealing Washer
 Temperature Range: -40°F (-40°C) to 212°F (100°C)
 IP Rating: IP 68, IP 69K