


## Heyco® Female Pin Connectors

### Round Barrel with Insulation Crimp

For mating Male Pins, see pages 8-45 & 8-46

For Female Ground Pins, see pages 8-41 & 8-44

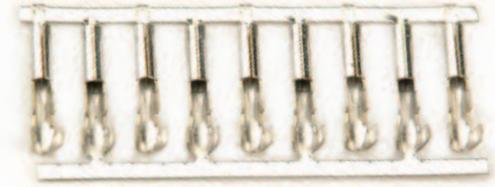

Inside Dia. in.	PART DATA		PART NO.	APPLICATION TOOLING*			Crimp Punch	Anvil
	AWG Range	Material		Die**	Feeds	Tool Packs		
<b>FE Series - .630" Overall Length</b>								
.060	20-18	Brass	<b>7382</b>	7382UXX5	Left to Right	B514L/B515L	C185	C189
.062	20-18	Brass	<b>7370†</b>	7370UXX5				
		Brass	<b>7386†</b>	7386UXX5				
.067	20-18	Brass	<b>7387</b>	7387UXX5				
.074	20-18	Brass	<b>7393</b>	7393UXX5				
.078	20-18	Brass	<b>7369</b>	7369UXX5				
.088	20-18	Brass	<b>7400</b>	7400UXX5				
.091	20-18	Brass	<b>7395</b>	7395UXX5				
.093	20-18	Brass	<b>7384</b>	7384UXX5				
.097	20-18	Brass	<b>7376</b>	7376UXX5				
.105	20-18	Brass	<b>7405</b>	7405UXX5				

\* Heyco high volume Application Tooling, designed for 3-5 ton presses - see page 8-59.

Heyco Mini Applicators, designed for 1.5-3 ton bench top presses, are available - see page 8-59.


\*\* “XX” represents Wire Gauge. Please specify Wire Gauge when ordering.

† Short Insulation.

### FE Series

- .63" (16,0 mm) Overall Length.
- .28" (7,1 mm) Round Barrel Length.
- Round barrel with wide inside diameter range: from .060" (1,5 mm) to 1.05" (26,7 mm).
- 1/4" (6,4 mm) spacing between connectors for quick, easy attachment.
- Conductor crimp ears only.
- Available only in continuous strip form, regular (left to right) wind.
- DFARS Compliant

Now Available in Single Reel Order Quantities!



FE Series

Materials

Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification)

Quick Specs