




Heyco-Flex™ "Quick Twist" Conduit Fittings

Straight-Thru, Snap-In Hubs
For use with Heyco-Flex™ II Tubing

- Snap-in Fittings are UL approved for use with Heyco-Flex™ II tubing. See page 1-2.
- One-piece solution with smooth internal surfaces provides for easier wire routing, protection, and installation.
- All nylon construction is resistant to salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. This feature is not assessed by UL certification and testing.
- Easy, permanent assembly: the installer twists the tubing over the connector ferrule, until the tubing clicks into place. It's that easy!
- No tools needed for installation.
- Unique locking fingers accommodate various panel thicknesses.
- Suitable for a wide array of electrical applications:
 - Commercial and Industrial HVAC Systems
 - Motorized Equipment
 - Enclosed Power Sources
 - Garage Door Openers
 - Major Appliances
- Finishing collars to neaten rough cut tubing ends.

FITS TUBING TRADE SIZE	PART NO.		DESCRIPTION	PART DIMENSIONS									
	Black	Gray		A Mounting Hole Dia.		B Overall Length		C Body Length		D Wrenching Nut		E Wrenching Flats	
				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
1/4	8515	8516	HFC 1/4-S-twist	.540	13,7	1.330	33,8	.344	8,7	.090	2,3	.750	19,0
3/8	8485	8486	HFC 3/8-S-twist	.875	22,2	1.376	35,0	.391	9,9	.090	2,3	1.000	25,4
1/2	8490	8491	HFC 1/2-S-twist	.875	22,2	1.376	35,0	.391	9,9	.090	2,3	1.000	25,4
3/4	8495	8496	HFC 3/4-S-twist	1.093	27,8	1.495	38,0	.391	9,9	.090	2,3	1.250	31,8

Standard colors black and gray. Consult Heyco for other colors.

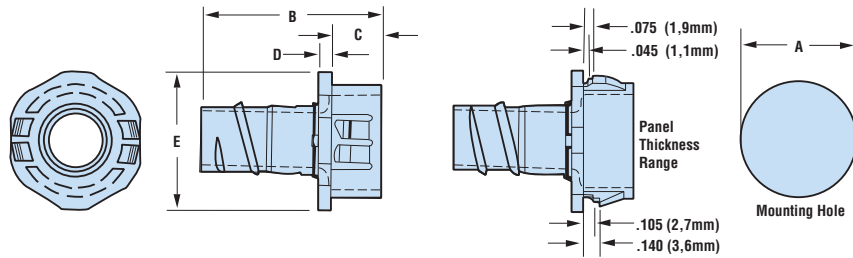

Heyco-Flex "Quick Twist" Finishing Collars



For use with Heyco-Flex™ I and II Conduit Fittings

FITS CONDUIT/ TRADE SIZE	PART NO.		DESCRIPTION
	Black	Gray	
3/8	8474	8482	HFC TWIST 3/8 COLLAR
1/2	8475	8483	HFC TWIST 1/2 COLLAR
3/4	8476	8484	HFC TWIST 3/4 COLLAR

Standard colors black and gray. Consult Heyco for other colors. (Not available in 1/4").

Quick Specs

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E121095
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)